


# 10104110-0001LF

#### 10104110-0001LF Information

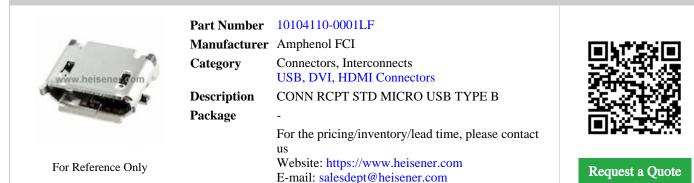

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### 10104110-0001LF Specifications

Manufacturer Amphenol FCI   Category Connectors, Interconnects   Backage -   Package -   Series -   Connector Type USB - micro B   Number of Contacts 5   Gender Receptacle   Specifications USB 2.0   Mounting Type Sufface Mount, Right Angle   Mounting Feature Solder   Features Solder Retention   Ingress Protection -   Number of Ports 1   Current Rating 1.8A per Contact   Voltage - Rated 1000/Categottee   Mating Cycles Shielding		
CategoryConnectors, InterconnectsUSB, DVI, HDMI ConnectorsPackage-Series-Connector TypeUSB - micro BNumber of Contacts5GenderReceptacleSpecificationsUSB 2.0Mounting TypeSolderMounting FeatureSolderFeaturesSolder RetentionAngress Protection-Operating Temperature-Number of Ports1Current Rating1.8A per ContactVoltage - Rated1000Maing Cycles10000ShieldingShieldenShieldingShielden	Manufacturer Part Number	10104110-0001LF
USB, DVI, HDMI ConnectorsPackage-Series-Connector TypeUSB - micro BNumber of Contacts5GenderReceptacleSpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated1000VACShieldingShielded	Manufacturer	Amphenol FCI
Package-Series-Connector TypeUSB - micro BNumber of Contacts5GenderReceptacleSpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalTerminationSolder RetentionFeaturesSolder RetentionNumber of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMaing CyclesSideledShieldingSideledShieldingSideled	Category	Connectors, Interconnects
Series-Connector TypeUSB - micro BNumber of Contacts5GenderReceptacleSpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature1Number of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMaing Cycles10000Shielding5.0Stielding <td< td=""><td></td><td>USB, DVI, HDMI Connectors</td></td<>		USB, DVI, HDMI Connectors
Connector TypeUSB - micro BNumber of Contacts5GenderReceptacleSpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionOperating Temperature-Operating Temperature1Number of Ports1Current Rating100VACMaing CyclesShieldingShieldingShielded	Package	-
Number of Contacts5GenderReceptacleSpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature30°C ~ 80°CNumber of Ports1Current Rating100VACMating Cycles10000ShieldingShielded	Series	-
GenderReceptacleGenderReceptacleSpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalMounting FeatureSolderFeaturesSolder RetentionIngress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating100VACMating Cycles10000ShielddingShielded	Connector Type	USB - micro B
SpecificationsUSB 2.0Mounting TypeSurface Mount, Right AngleMounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated1000VACMating CyclesShielded	Number of Contacts	5
ASurface Mount, Right AngleMounting TypeKurface Mount, Right AngleMounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated1000VACMating Cycles10000StieldeingStielded	Gender	Receptacle
Mounting FeatureHorizontalTerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Specifications	USB 2.0
TerminationSolderFeaturesSolder RetentionIngress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Mounting Type	Surface Mount, Right Angle
FeaturesSolder RetentionIngress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Mounting Feature	Horizontal
Ingress Protection-Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Termination	Solder
Operating Temperature-30°C ~ 80°CNumber of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Features	Solder Retention
Number of Ports1Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Ingress Protection	-
Current Rating1.8A per ContactVoltage - Rated100VACMating Cycles10000ShieldingShielded	Operating Temperature	-30°C ~ 80°C
Voltage - Rated100VACMating Cycles10000ShieldingShielded	Number of Ports	1
Mating Cycles10000ShieldingShielded	Current Rating	1.8A per Contact
Shielding Shielded	Voltage - Rated	100VAC
-	Mating Cycles	10000
Report errors?	Shielding	Shielded
		Report errors?

#### 10104110-0001LF Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# 10104110-0001LF Payment Methods





If you have any question about 10104110-0001LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com