

102192-2

102192-2 Information

	Part Number	102192-2	
C Heisener.com	Manufacturer	TE Connectivity AMP Connectors	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	58 MODII HORZ DR CE 100CL/115	- 354 kar
	Package	-	- 国教教教社
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



102192-2 Specifications

Manufacturer Part Number102192-2ManufacturerTE Connectivity AMP ConnectorsCategoryConnectors, InterconnectsPackage-Package-SeriesMIL-C-55302, AMPMODU Mod IIConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAIINumber of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeSub-PullContact Finish - MatingGoldContact Finish - MatingSin (0.127µm)Insulation ColorNaturalInsulation Height0.238° (6.05mm)				
CategoryConcerts, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMIL-C-55302, AMPMODU Mod IIConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS8Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorSutural	Manufacturer Part Number	102192-2		
NumberRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMIL-C-55302, AMPMODU Mod IIConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS8Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hoalge AllTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - MatingSin (0.127µm)Insulation ColorSin (0.127µm)	Manufacturer	TE Connectivity AMP Connectors		
Package-SeriesMIL-C-55302, AMPMODU Mod IIConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeQoidContact Finish - MatingGoldContact Finish Finkeness - MatingSpin (0.127µm)Insulation ColorNatural	Category	Connectors, Interconnects		
SeriesMIL-C-55302, AMPMODU Mod IIConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingSin (0.127µm)Insulation ColorNatural		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AnglePiteninationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorSin (0.127µm)Insulation ColorNatural	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonator Finish - MatingSpin (0.127µm)Insulation ColorNatural	Series	MIL-C-55302, AMPMODU Mod II		
StyleBoard to BoardStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorSpin (0.127µm)Number of ColorNatural	Connector Type	Receptacle		
Number of Positions58Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeO.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingSpin (0.127µm)Insulation ColorNatural	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingSipin (0.127µm)Insulation ColorNatural	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingSini (0.127µm)Insulation ColorNatural	Number of Positions	58		
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating5µin (0.127µm)Insulation ColorNatural	Number of Positions Loaded	All		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating5µin (0.127µm)Insulation ColorNatural	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating5µin (0.127µm)Insulation ColorNatural	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating5μin (0.127μm)Insulation ColorNatural	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating5µin (0.127µm)Insulation ColorNatural	Mounting Type	Through Hole, Right Angle		
Contact Finish - MatingGoldContact Finish Thickness - Mating5μin (0.127μm)Insulation ColorNatural	Termination	Solder		
Contact Finish Thickness - Mating5µin (0.127µm)Insulation ColorNatural	Fastening Type	Push-Pull		
Insulation Color Natural	Contact Finish - Mating	Gold		
	Contact Finish Thickness - Mating	5μin (0.127μm)		
Insulation Height 0.238" (6.05mm)	Insulation Color	Natural		
	Insulation Height	0.238" (6.05mm)		
Contact Length - Post 0.115" (2.92mm)	Contact Length - Post	0.115" (2.92mm)		
Operating Temperature -	Operating Temperature	-		
Material Flammability Rating -	Material Flammability Rating	-		

Contact Finish - Post	Gold		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

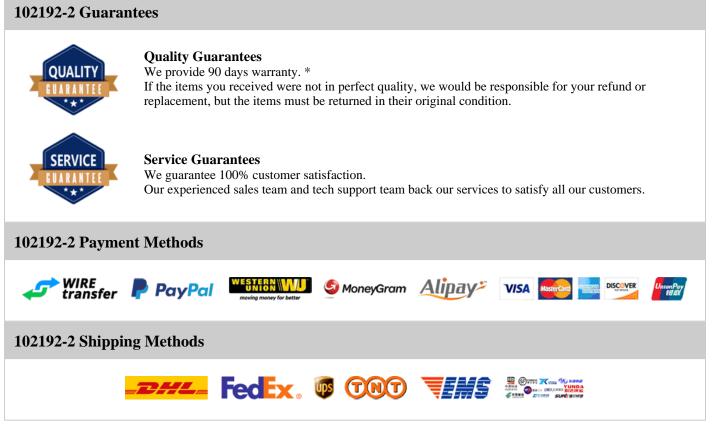

If you have any question about 102192-2, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com