

10KR85

10KR85 Information



For Reference Only

Part Number	10KR85	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 10A 415VAC NON STD	
Package	Cartridge, Non-Standard	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



10KR85 Specifications

Manufacturer Eaton Category Circuit Protection Electrical, Specialty Fuses Electrical, Specialty Fuses Package Cartridge, Non-Standard Stries - Fuse Type Cartridge, Non-Standard Current Rating IOA Voltage Rating - AC 415V Voltage Rating - DC - Response Time - Applications Electrical, Industrial Class - Approvals ASTA Operating Temperature - Breaking Capacity @ Rated Voltage 33kA Mounting Type Holder Package / Case Cartridge, Non-Standard		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardSeries-Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Di x 2.244" L (22.0mm x 57.00mm)	Manufacturer Part Number	10KR85
Identical Specialty FusesPackageCartridge, Non-StandardSeries-Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Type-Breaking Capacity @ Rated Voltage33kAMounting TypeFolderPackage / CaseCartridge, Non-StandardSize / Dimension5874" L (22.20mm x 57.00mm)	Manufacturer	Eaton
PackageCartridge, Non-StandardSeries-Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Type-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Diax 2.244" L (22.20mm x 57.00mm)	Category	Circuit Protection
Series-Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / Case0.874" Diax 2.244" L (22.20mm x 57.00mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / Case0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Package	Cartridge, Non-Standard
Current Rating10AVoltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / Case0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Series	-
Voltage Rating - AC415VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / Case0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Current Rating	10A
Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Voltage Rating - AC	415V
ApplicationsElectrical, IndustrialApplications-Features-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Voltage Rating - DC	-
Features-Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Response Time	-
Class-ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Applications	Electrical, Industrial
ApprovalsASTAOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Features	-
AOperating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Class	-
Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Approvals	ASTA
Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Operating Temperature	-
Package / CaseCartridge, Non-StandardSize / Dimension0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Breaking Capacity @ Rated Voltage	33kA
Size / Dimension 0.874" Dia x 2.244" L (22.20mm x 57.00mm)	Mounting Type	Holder
	Package / Case	Cartridge, Non-Standard
Report errors?	Size / Dimension	0.874" Dia x 2.244" L (22.20mm x 57.00mm)
		Report errors?

10KR85 Guarantees

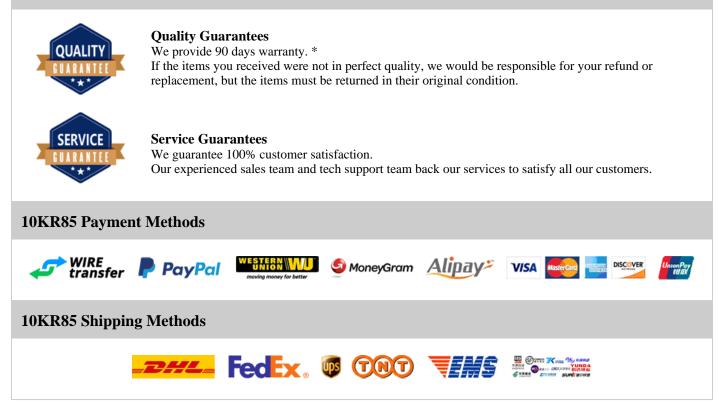

If you have any question about 10KR85, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com