

1210Y0250221GFT

1210Y0250221GFT Information

Heisener.com	 1210Y0250221GFT Knowles Syfer Capacitors Ceramic Capacitors CAP CER 220PF 25V C0G/NP0 1210 1210 (3225 Metric) For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1210Y0250221GFT Specifications

Manufacturer Part Number 1210Y0250221GFT Manufacturer Knowles Syfer Category Capacitors Category Ceramic Capacitors Package 1210 (3225 Metric) Series FlexiCap? Capacitance 220pF Tolerance ±2% Voltage - Rated 25V Operating Temperature 05°C ~ 125°C Operating Temperature 55°C ~ 125°C Features High Temperature Applications High Reliability Failure Rate - Mounting Type Surface Mount, MLCC Mounting Type 1210 (3225 Metric) Size / Dimension 0.126° L x 0.098° W (3.20mm x 2.50mm) Height - Seated (Max) - Thickness (Max) 0.707° (2.00mm) Lead Spacing - Lead Spacing - Lead Spacing -		
CategoryCapacitorsPackage1210 (3225 Metric)SeriesFlexiCap?Capacitance220pFColerance±2%Voltage - RatedCoG, NPOOperating Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesHigh TemperatureApplications-ApplicationsSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126° L x 0.098° W (3.20mm x 2.50mm)Hight - Seated (Max)-Hight Seated (Max)-Hight Seated (Max)-Lead Spacing0.079° (2.00mm)Lead Style-Lead Style-Lead Style-Case-Case-Case-Street Max-Case	Manufacturer Part Number	1210Y0250221GFT
Indext of the section and the	Manufacturer	Knowles Syfer
Package1210 (3225 Metric)SeriesFlexiCap?Capacitance220pFTolerance±2%Voltage - Rated55VCorg, NP0.55°C ~ 125°COperating TemperatureHigh TemperatureRatings-ApplicationsHigh ReliabilityFaiture Rate.Mounting TypeSurface Mount, MLCCPackage / Case.1210 (3225 Metric)Size / Dimension.126° L x 0.098° W (3.20mm x 2.50mm)Height - Seated (Max).Height - Seated (Max).Lead Spacing.Lead Style.Lead Style.	Category	Capacitors
SeriesFlexiCap?Capacitance220pFTolerance±2%Voltage - Rated25VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCSize / Dimension0.126° L x 0.098° W (3.20mm x 2.50mm)Hight - Seated (Max)-Thickness (Max)0.079° (2.00mm)Lead Spacing-Lead Style-Starten Starten-Starten Starten-Starten Starten-Starten Starten Starten-Starten Starten Sta		Ceramic Capacitors
Capacitance200FTolerance±2%Voltage - Rated25VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCSize / Dimension0.126° L x 0.098° W (3.20mm x 2.50mm)Hight - Seated (Max)-Thickness (Max)0.079° (2.00mm)Lead Spacing-Lead Style-	Package	1210 (3225 Metric)
Tolerance±2%Voltage - Rated25VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Lead Spacing0.079" (2.00mm)Lead Style-State Style-	Series	FlexiCap?
Voltage - Rated25VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Lead Spacing-Lead Style-Lead Style-	Capacitance	220pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126° L x 0.098° W (3.20mm x 2.50mm)Hight - Seated (Max)-Thickness (Max)0.079° (2.00mm)Lead Spacing-Lead Style-	Tolerance	±2%
Operating Temperature-55°C ~ 125°CFeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Voltage - Rated	25V
FeaturesHigh TemperatureRatings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Height - Seated (Max)-Height - Seated (Max)-<	Operating Temperature	-55°C ~ 125°C
ApplicationsHigh ReliabilityFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Features	High Temperature
Failure Rate-Foilure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Ratings	-
Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Applications	High Reliability
Package / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Failure Rate	-
Size / Dimension 0.126" L x 0.098" W (3.20mm x 2.50mm) Height - Seated (Max) - Thickness (Max) 0.079" (2.00mm) Lead Spacing - Lead Style -	Mounting Type	Surface Mount, MLCC
Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-Lead Style-	Package / Case	1210 (3225 Metric)
Thickness (Max) 0.079" (2.00mm) Lead Spacing - Lead Style -	Size / Dimension	0.126" L x 0.098" W (3.20mm x 2.50mm)
Lead Spacing-Lead Style-	Height - Seated (Max)	-
Lead Style -	Thickness (Max)	0.079" (2.00mm)
-	Lead Spacing	-
Report errors?	Lead Style	-
		Report errors?

1210Y0250221GFT Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

1210Y0250221GFT Payment Methods

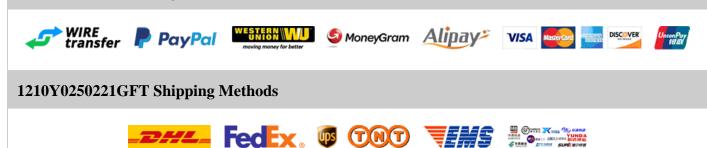

If you have any question about 1210Y0250221GFT, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com