

1210Y0250223FCT

1210Y0250223FCT Information

Heisener.com	Part Number Manufacturer Category Description Package	1210Y0250223FCT Knowles Syfer Capacitors Ceramic Capacitors CAP CER 0.022UF 25V C0G/NP0 1210 1210 (3225 Metric) For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1210Y0250223FCT Specifications

ManufacturerKnowles SyferCapacitorsCaramic CapacitorsPackage1210 (3225 Metric)SeriesFlexiCap?Capacitance0.022µFTolerance±1%Voltage - Rated25VTomperature CoefficientCOG, NP0 (1B)Operating TemperatureSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-ApplicationsSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Height - Seated (Max)-Lead Spacing0.079" (2.00mm)		
CategoryCapacitorsPackage1210 (3225 Metric)Package1210 (3225 Metric)SeriesFlexiCap?Capacitance0.022µFTolerance±1%Voltage - Rated25VCoperating Temperature CoefficientCOG, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Manufacturer Part Number	1210Y0250223FCT
Ceramic CapacitorsPackage1210 (3225 Metric)SeriesFlexiCap?Capacitance0.022µFTolerance±1%Voltage - Rated25VTemperature CoefficientC0G, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126° L x 0.098° W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079° (2.00mm)Lead Spacing-	Manufacturer	Knowles Syfer
Package1210 (3225 Metric)SeriesFlexiCap?Capacitance0.022µFTolerance±1%Voltage - Rated25VTemperature CoefficientCOG, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Category	Capacitors
SeriesFlexiCap?Capacitance0.022µFTolerance±1%Voltage - Rated25VTemperature CoefficientCOG, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Lead Spacing-		Ceramic Capacitors
Capacitance0.022µFTolerance±1%Voltage - Rated25VTemperature CoefficientC0G, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturessSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Lead Spacing-	Package	1210 (3225 Metric)
Tolerance±1%Voltage - Rated25VTemperature CoefficientC0G, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Lead Spacing-	Series	FlexiCap?
Voltage - Rated25VTemperature CoefficientC0G, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Capacitance	0.022µF
Temperature CoefficientCOG, NP0 (1B)Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Tolerance	±1%
Operating Temperature-55°C ~ 125°CFeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Voltage - Rated	25V
FeaturesSoft TerminationRatings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Temperature Coefficient	C0G, NP0 (1B)
Ratings-ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Operating Temperature	-55°C ~ 125°C
ApplicationsBoardflex SensitiveFailure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Features	Soft Termination
Fri lure Rate-Failure Rate-Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Ratings	-
Mounting TypeSurface Mount, MLCCPackage / Case1210 (3225 Metric)Size / Dimension0.126" L x 0.098" W (3.20mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Applications	Boardflex Sensitive
Package / Case 1210 (3225 Metric) Size / Dimension 0.126" L x 0.098" W (3.20mm x 2.50mm) Height - Seated (Max) - Thickness (Max) 0.079" (2.00mm) Lead Spacing -	Failure Rate	-
Size / Dimension 0.126" L x 0.098" W (3.20mm x 2.50mm) Height - Seated (Max) - Thickness (Max) 0.079" (2.00mm) Lead Spacing -	Mounting Type	Surface Mount, MLCC
Height - Seated (Max)-Thickness (Max)0.079" (2.00mm)Lead Spacing-	Package / Case	1210 (3225 Metric)
Thickness (Max) 0.079" (2.00mm) Lead Spacing -	Size / Dimension	0.126" L x 0.098" W (3.20mm x 2.50mm)
Lead Spacing -	Height - Seated (Max)	-
	Thickness (Max)	0.079" (2.00mm)
Lead Style -	Lead Spacing	-
	Lead Style	-
Report errors?		Report errors?

1210Y0250223FCT Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

1210Y0250223FCT Payment Methods

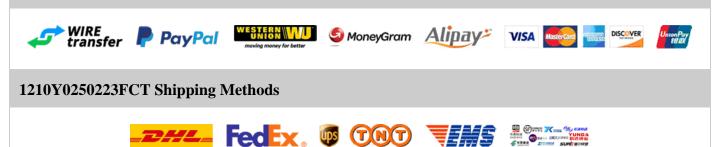



If you have any question about 1210Y0250223FCT, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com