


# 123-93-964-41-001000

#### 123-93-964-41-001000 Information

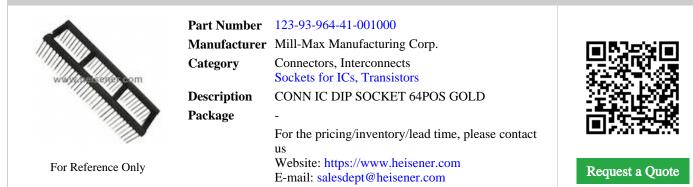

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# 123-93-964-41-001000 Specifications

Manufacturer Part Number123-93-964-41-001000ManufacturerMill-Max Manufacturing Corp.CategoryConnectors, InterconnectsSockets for ICs, TransistorsPackage-Series123StripeDIP, 0.9" (22.86mm) Row SpacingNumber of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen FrameTerminationWire Wrap
CategoryConnectors, InterconnectsSockets for ICs, TransistorsPackagePackageSeries123TypeDIP, 0.9" (22.86mm) Row SpacingNumber of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - MatingSoluin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeFeaturesOpen Frame
Sockets for ICs, TransistorsPackage-Series123TypeDIP, 0.9" (22.86mm) Row SpacingNumber of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Package-Series123TypeDIP, 0.9" (22.86mm) Row SpacingNumber of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Series123TypeDIP, 0.9" (22.86mm) Row SpacingNumber of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
TypeDIP, 0.9" (22.86mm) Row SpacingNumber of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Number of Positions or Pins (Grid)64 (2 x 32)Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Pitch - Mating0.100" (2.54mm)Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Contact Finish Thickness - Mating30µin (0.76µm)Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Contact Material - MatingBeryllium CopperMounting TypeThrough HoleFeaturesOpen Frame
Mounting Type Through Hole   Features Open Frame
Features Open Frame
Termination Wire Wrap
Pitch - Post 0.100" (2.54mm)
Contact Finish - Post Tin-Lead
Contact Finish Thickness - Post 200µin (5.08µm)
Contact Material - Post Brass Alloy
Housing Material Polycyclohexylenedimethylene Terephthalate (PCT), Polyester
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$
Report errors?

### 123-93-964-41-001000 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER





If you have any question about 123-93-964-41-001000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com