

# 1412755

### 1412755 Information

	Part Number	1412755
	Manufacturer	Phoenix Contact
www.heisener.com	Category	Connectors, Interconnects Heavy Duty Connectors - Housings, Hoods, Bases
5	Description	CONN HOOD TOP ENTRY SZB24 PG21
	Package	-
		For the pricing/inventory/lead time, please contact
For Reference Only		us Website: https://www.heisener.com

## **Certified Quality**

For Reference Only

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




Request a Quote

### 1412755 Specifications

Manufacturer Part Number1412755ManufacturerPhoeix ContactCategoryConnectors, InterconnectsHeavy Duty Connectors - Housings, Hoods, BasesPackage-SeriesHEAVYCON? BConnector TypeHoodStyleTop EntryStyleB24Lock LocationLocking Clip (2) on Base BottomStread SizePG21Size J Dimension-Housing Color-FeaturesSalt Vater ResistantHousing MaterialNew Size Size AlignHousing Material-Housing Finish-Housing Finish <th></th> <th></th> <th></th>			
CategoryConnectors, InterconnectsHeavy Duty Connectors - Housings, Hoods, BasesPackage-Package-SeriesHEAVYCON? BConnector TypeHoodStyleTop EntrySizeB24Lock LocationLocking Clip (2) on Base BottomThread SizeHO21Size/ Dimension-Active La LATS2" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)FeaturesSalt Water Resistant, Water proofFousing Color-Housing MaterialHoodHousing Material-Housing Finish-Operating Temperature40°c ~ 125°C	Manufacturer Part Number	1412755	
Heavy Duty Connectors - Housings, Hoods, BasesPackage-SeriesHEAVYCON'BConnector TypeHoodStyleTop EntrySizeB24Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size/ Dimension-Housing ColorSil Water Resistant, WaterproofFeaturesBofo/FogK - Dust Tight, Water Resistant, WaterproofHousing Material-Housing Finish-Housing Finish-Operating Temperature-40°C ~ 125°C	Manufacturer	Phoenix Contact	
Package-SeriesHEAVYCON? BConnector TypeHoodStyleTop EntrySizeB24Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Operating Temperature-40°C ~ 125°C	Category	Connectors, Interconnects	
SeriesHEAVYCON? BConnector TypeHoodStyleTop EntrySizeB24Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionHoof/fogK - Dust Tight, Water ProofHousing Finish-Housing Finish-Housing Finish-Operating Temperature40°C ~ 125°C		Heavy Duty Connectors - Housings, Hoods, Bases	
Connector TypeHoodStyleTop EntrySizeB24Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionHo6/67/69K - Dust Tight, Water Resistant, Water proofHousing Finish-Housing Finish-Auminum, Die Cast-Housing Temperature40°C ~ 125°C	Package	-	
StyleTop EntrySizeB24Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionHo6/67/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Housing Finish-Operating Temperature-40°C ~ 125°C	Series	HEAVYCON? B	
SizeB24Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Housing Finish-Operating Temperature-40°C ~ 125°C	Connector Type	Hood	
Lock LocationLocking Clip (2) on Base BottomThread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Housing Finish-Operating Temperature40°C ~ 125°C	Style	Top Entry	
Thread SizePG21Size / Dimension4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)Housing Color-FeaturesSalt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Size	B24	
Size / Dimension 4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)   Housing Color -   Features Salt Water Resistant   Ingress Protection IP66/67/69K - Dust Tight, Water Resistant, Waterproof   Housing Material Aluminum, Die Cast   Housing Finish -   Operating Temperature -40°C ~ 125°C	Lock Location	Locking Clip (2) on Base Bottom	
Housing Color-FeaturesSalt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Thread Size	PG21	
FeaturesSalt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Size / Dimension	4.724" L x 1.732" W x 2.992" H (120.00mm x 44.00mm x 76.00mm)	
Ingress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Housing Color	-	
Housing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Features	Salt Water Resistant	
Housing Finish-Operating Temperature-40°C ~ 125°C	Ingress Protection	IP66/67/69K - Dust Tight, Water Resistant, Waterproof	
Operating Temperature $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Housing Material	Aluminum, Die Cast	
	Housing Finish	-	
Report errors?	Operating Temperature	-40°C ~ 125°C	
			Report errors?

E-mail: salesdept@heisener.com

#### 1412755 Guarantees

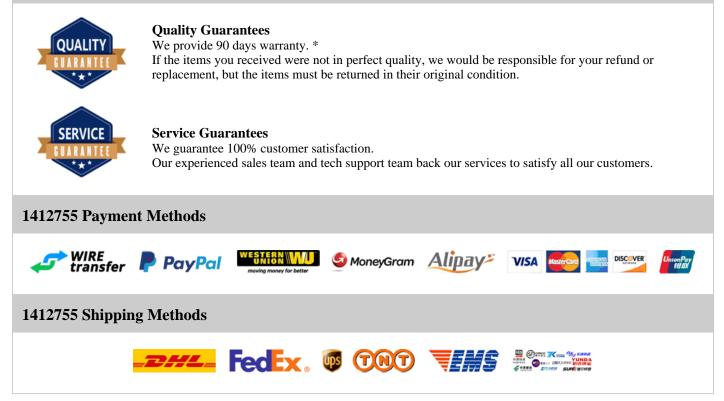

If you have any question about 1412755, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com