

1413932

1413932 Information



Part Number	1413932	
Manufacturer	Phoenix Contact	
Category	Connectors, Interconnects Circular Connectors	
Description	CONN RCPT FMALE M12 2POS IDC	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1413932 Specifications

Manufacturer Part Number1413932ManufacturerPhoenix ContactCategoryConnectors, InterconnectsCategoryCircular ConnectorsPackage-SeriesPROFIBUS DPConnector TypeReceptacle, Female SocketsNumber of Positions2Shell Size AnsertM12-2Shell Size, MIL-Parting TypeFree Hanging (In-Line)Fastening TypePush-TwistOrientationBIngress ProtectionJob Pisof 7 - Dust Tight, Water Resistant, WaterproofShell Material, FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating64A		
CategoryConnectorsCategoryConnectorsPackage-Package-SeriesPROFIBUS DPConnector TypeReceptacle, Female SocketsNumber of Positions2Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationDCFastening TypePush-TwistOrientationBIngress ProtectionPo5/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishGoldContact FinishGoldVoltage - Rated60VDCCurrent Rating4A	Manufacturer Part Number	1413932
Circular ConnectorsPackage-SeriesPROFIBUS DPConnector TypeReceptacle, Female SocketsNumber of Positions2Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionMo5/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Manufacturer	Phoenix Contact
Package-SeriesPROFIBUS DPConnector TypeReceptacle, Female SocketsNumber of Positions2Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionSieb (5/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Category	Connectors, Interconnects
SeriesPROFIBUS DPConnector TypeReceptacle, Female SocketsNumber of Positions2Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionGoldShell Material, FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A		Circular Connectors
Connector TypeReceptacle, Female SocketsNumber of Positions2Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionPo5/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCKurrent Rating4A	Package	-
Number of Positions2Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Series	PROFIBUS DP
Shell Size - InsertM12-2Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionPfo5/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishBackshell, ShieldedYoltage - Rated60VDCKurrent Rating4A	Connector Type	Receptacle, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionPos/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishCinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Number of Positions	2
Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Shell Size - Insert	M12-2
TerminationIDCFastening TypePush-TwistOrientationBIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Shell Size, MIL	-
Fastening TypePush-TwistOrientationBIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Mounting Type	Free Hanging (In-Line)
OrientationBIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Fermination	IDC
Ingress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Fastening Type	Push-Twist
Shell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Drientation	В
Contact FinishGoldFeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	ngress Protection	IP65/67 - Dust Tight, Water Resistant, Waterproof
FeaturesBackshell, ShieldedVoltage - Rated60VDCCurrent Rating4A	Shell Material, Finish	Zinc Die Cast, Nickel Plated
Voltage - Rated60VDCCurrent Rating4A	Contact Finish	Gold
Current Rating 4A	Features	Backshell, Shielded
	Voltage - Rated	60VDC
Repo	Current Rating	4A
		Report errors?

1413932 Guarantees

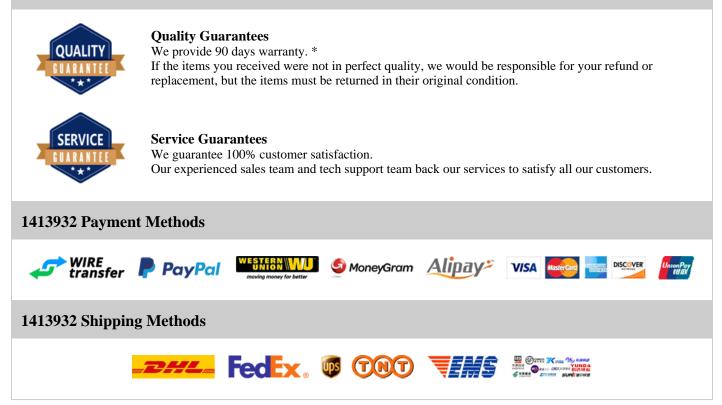

If you have any question about 1413932, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com