

1419639

1419639 Information

Heisener.com	Part Number Manufacturer Category Description Package	1419639 Phoenix Contact Connectors, Interconnects Circular Connectors SACC-M12MSS-2PECON-PG 9-M - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote




Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1419639 Specifications

Manufacturer Part Number 1419639 Manufacturer Phoenix Contact Category Connectors, Interconnects Category Circular Connectors Package - Series SACC Connector Type Plug, Male Pins Number of Positions 3 (Power) Shell Size - Insert M12-3 Mounting Type Free Hanging (In-Line) Termination Solder Fastening Type Threaded Orientation S Ingress Protection Sice Disc Xickel Plated Contact Finish Gold Features Backshell Voltage - Rated 230VAC Current Rating -		
CategoryConnectors, Interconnects Circular ConnectorsPackage-SeriesSACCConnector TypePlug, Male PinsNumber of Positions3 (Power)Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderGrienationSIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFeaturesBackshellVoltage - Rated30VACCurrent Rating-Statening TypeSackaclShell Statening TypeSolderContact FinishSolderContact FinishSackshellContact FinishSackshellStateningSackshell	Manufacturer Part Number	1419639
Circular ConnectorsPackage-SeriesSACCConnector TypePlug, Male PinsNumber of Positions3 (Power)Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSShell Material, FinishGoldShell Material, FinishGoldFeaturesBackshellVoltage - Rated30VACCurrent Rating-Stateman-	Manufacturer	Phoenix Contact
Package.SeriesSACCConnector TypePug, Male PinsNumber of Positions3 (Power)Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSShell Material, FinishGlodShell Material, FinishGoldFeaturesGoldFotage RatedSackshellVoltage - RatedSacy SchellCurrent RatingSacy SchellState Material FinishSackshellState Material FinishSackshellState Material FinishSacy SchellState Material Finish<	Category	Connectors, Interconnects
SeriesSACCConnector TypePlug, Male PinsNumber of Positions3 (Power)Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSIngress ProtectionHP67 - Dust Tight, WaterproofShell Material, FinishGoldFoaturesBackshellVoltage - Rated30VACCurrent Rating-Current Rating-		Circular Connectors
Connector TypePlug, Male PinsNumber of Positions3 (Power)Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldFoaturesBackshellVoltage - Rated30VACCurrent Rating-Support-Suppor	Package	-
Number of Positions3 (Power)Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSIngress ProtectionP67 - Dust Tight, WaterproofShell Material, FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Series	SACC
Shell Size - InsertM12-3Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFeaturesBackshellVoltage - Rated30VACCurrent Rating-	Connector Type	Plug, Male Pins
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSOrientationIP67 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFeaturesBackshellVoltage - Rated30VACCurrent Rating-	Number of Positions	3 (Power)
Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypeThreadedOrientationSIngress ProtectionP67 - Dust Tight, WaterproofShell Material, FinishCinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Shell Size - Insert	M12-3
TerminationSolderFastening TypeThreadedOrientationSIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Shell Size, MIL	-
Fastening TypeThreadedFastening TypeSOrientationIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Mounting Type	Free Hanging (In-Line)
OrientationSIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Termination	Solder
Ingress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Fastening Type	Threaded
Shell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Orientation	S
Contact FinishGoldFeaturesBackshellVoltage - Rated230VACCurrent Rating-	Ingress Protection	IP67 - Dust Tight, Waterproof
FeaturesBackshellVoltage - Rated230VACCurrent Rating-	Shell Material, Finish	Zinc Die Cast, Nickel Plated
Voltage - Rated230VACCurrent Rating-	Contact Finish	Gold
Current Rating -	Features	Backshell
	Voltage - Rated	230VAC
Report errors?	Current Rating	-
		Report errors?

1419639 Guarantees

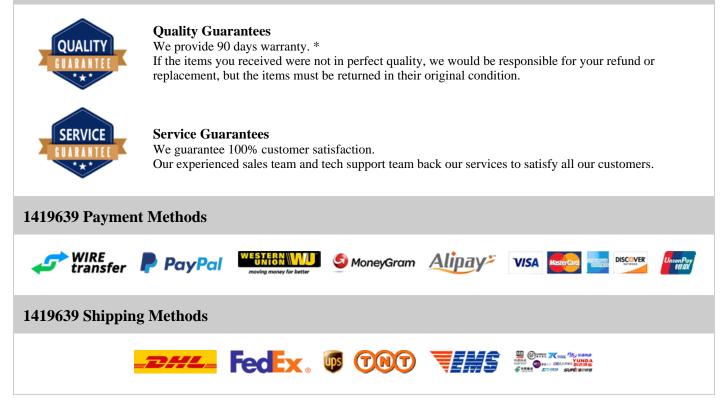

If you have any question about 1419639, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com