

1424243

1424243 Information



For Reference Only

Part Number	1424243	
Manufacturer	Phoenix Contact	
Category	Connectors, Interconnects Circular Connectors	
Description	CONN SOCKET 6POS PANEL MOUNT R/A	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1424243 Specifications

Manufacturer Part Number 1424243 Manufacturer Phoenix Contact Category Connectors, Interconnects Category Circular Connectors Package - Series SACC Connector Type Receptacle, Female Sockets Number of Positions 6 Shell Size - Insert M8-6 Mounting Type Panel Mount, Bulkhead; Through Hole, Right Angle Yennation Solder Fastening Type Threaded Orientation A Ingress Protection Gold Shell Material, Finish Gold Contact Finish Gold Voltage - Rated 30V Courten Rating I.5A		
CategoryConnectors, InterconnectsCarcular ConnectorsPackage-SeriesSACCConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - InsertM8-6Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderGrientationNoterIngress ProtectionM67 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFeaturesBoard LockFotage RatedSolyCurrent Rating1.5A	Manufacturer Part Number	1424243
Initial ConnectorsPackage-SeriesSACCConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - InsertM8-6Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationH967 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFastenerBoard LockVoltage - RatedJovCurrent RatingJosShell StatedSolderSolderSolderSolderSolderShell Material, FinishSolderSold Conter FinishSolderSolder StatedSolderSolder StatedSolder <t< td=""><td>Manufacturer</td><td>Phoenix Contact</td></t<>	Manufacturer	Phoenix Contact
Package-SeriesSACCConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - InsertM8-6Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAShell Material, FinishGoldShell Material, FinishGoldFaturesGoldFaturesSond LockFaturesBoard LockFortage Rated30VCurrent Rating1.5A	Category	Connectors, Interconnects
SeriesSACCConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - InsertM8-6Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A		Circular Connectors
Connector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - InsertM8-6Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldFoaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Package	-
Number of Positions6Number of PositionsM8-6Shell Size - Insert-Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFeaturesBoard LockVoltage - RatedJOVCurrent Rating1.5A	Series	SACC
Shell Size - InsertM8-6Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishGoldContact FinishGoldFeaturesBoard LockVoltage - RateingJ5A	Connector Type	Receptacle, Female Sockets
Shell Size, MIL-Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishSico Die Cast, Nickel PlatedContact FinishGoldFeaturesBaard LockVoltage - Rated30VCurrent Rating1.5A	Number of Positions	6
Mounting TypePanel Mount, Bulkhead; Through Hole, Right AngleTerminationSolderFastening TypeThreadedOrientationAOrientationIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBoard LockVoltage - RatedJVLurent Rating1.5A	Shell Size - Insert	M8-6
TerminationSolderFastening TypeThreadedOrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Shell Size, MIL	-
Fastening TypeThreadedFastening TypeAOrientationIP67 - Dust Tight, WaterproofIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Mounting Type	Panel Mount, Bulkhead; Through Hole, Right Angle
OrientationAIngress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Termination	Solder
Ingress ProtectionIP67 - Dust Tight, WaterproofShell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Fastening Type	Threaded
Shell Material, FinishZinc Die Cast, Nickel PlatedContact FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Orientation	А
Contact FinishGoldFeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Ingress Protection	IP67 - Dust Tight, Waterproof
FeaturesBoard LockVoltage - Rated30VCurrent Rating1.5A	Shell Material, Finish	Zinc Die Cast, Nickel Plated
Voltage - Rated30VCurrent Rating1.5A	Contact Finish	Gold
Current Rating 1.5A	Features	Board Lock
-	Voltage - Rated	30V
Report errors?	Current Rating	1.5A
		Report errors?

1424243 Guarantees

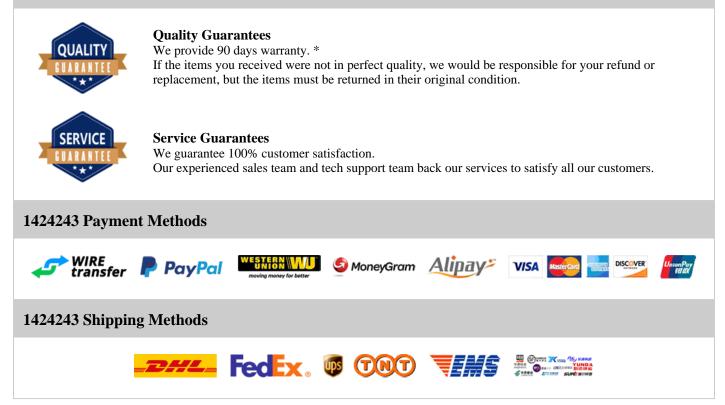

If you have any question about 1424243, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com