

# 1445777-3

### 1445777-3 Information

Heisener.com	1445777-3 TE Connectivity AMP Connectors Connectors, Interconnects Circular Connectors CONN PLUG CPC 18POS SOLDER CUP - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

# **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 1445777-3 Specifications

ManufacturerTE Connectivity AMP ConnectorsCategoryConnectors, InterconnectsCategoryCircular ConnectorsPackage-PackageMicro CPCConnector TypePlug, Female SocketsNumber of Positions18Shell Size - InsertM13.5Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFasteningSpring ProbeVoltage - RatedSpring ProbeVoltage - RatedSpring ProbeShell Stare SourceSpring ProbeStare SourceSpring Probe <trtr>Stare</trtr>		
CategoryConnectors, Interconnects Circular ConnectorsPackage-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions18Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionThermoplasticShell Material, FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Manufacturer Part Number	1445777-3
Circular ConnectorsPackage-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions18Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionP65 - Dust Tight, Water ResistantShell Material, FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Manufacturer	TE Connectivity AMP Connectors
Package-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions18Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Mounting TypeSolder CupFastening TypeLatch LockOrientationH95 - Dust Tight, Water ResistantShell Material, FinishThermoplasticShell Material, FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Category	Connectors, Interconnects
SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions18Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationH95 - Dust Tight, Water ResistantShell Material, FinishThermoplasticShell Material, FinishSolderContact FinishSpring ProbeVoltage - RatedSpring ProbeQuerent Rating2A		Circular Connectors
Connector TypePlug, Female SocketsNumber of Positions18Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionThermoplasticShell Material, FinishGoldFeaturesSpring ProbeVoltage - RatedSpring ProbeCurrent Rating2A	Package	-
Number of Positions18Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishGoldContact FinishSpring ProbeVoltage - Rated250VCurrent Rating2A	Series	Micro CPC
Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishGoldContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Connector Type	Plug, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionMeroplasticShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Number of Positions	18
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Shell Size - Insert	M13.5
TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Shell Size, MIL	-
Fastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Mounting Type	Free Hanging (In-Line)
OrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Termination	Solder Cup
Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Fastening Type	Latch Lock
Shell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Orientation	Keyed
Contact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Ingress Protection	IP65 - Dust Tight, Water Resistant
FeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Shell Material, Finish	Thermoplastic
Voltage - Rated250VCurrent Rating2A	Contact Finish	Gold
Current Rating 2A	Features	Spring Probe
-	Voltage - Rated	250V
Report errors?	Current Rating	2A
		Report errors?

#### 1445777-3 Guarantees

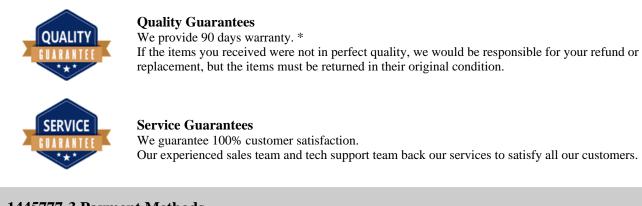



If you have any question about 1445777-3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com