

1445777-7

a Quote

1445777-7 Information

C Heisener.com	Part Number	1445777-7	
	Manufacturer	TE Connectivity AMP Connectors	ਿ∎ੱਤ
	Category	Connectors, Interconnects Circular Connectors	
	Description	CONN PLUG CPC 16POS SOLDER CUP	- 543
	Package	-	148
		For the pricing/inventory/lead time, please contact	l Eiñ
For Reference Only		us Wahaita, https://www.haisanan.com	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Reques

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1445777-7 Specifications

ManufacturerTE Connectivity AMP ConnectorsCategoryConnectors, InterconnectsPackage-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions16Shell Size - InsertMi13.5Shell Size, MIL-Mounting TypeFere Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationHofs - Dust Tight, Water ResistantShell Material, FinishGoldContact FinishSpring ProbeFastenerSpring ProbeVoltage - RatedSpring ProbeVoltage - RatedSpring ProbeCurrent RatingSpring ProbeStaten RatenerSpring ProbeStatenerSpring ProbeCurrent RatingSpring ProbeCurrent Rating		
CategoryConnectors, Interconnects Circular ConnectorsPackage-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions16Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationH95 - Dust Tight, Water ResistantShell Material, FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Manufacturer Part Number	1445777-7
Circular ConnectorsPackage-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions16Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionP65 - Dust Tight, Water ResistantShell Material, FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Manufacturer	TE Connectivity AMP Connectors
Package-SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions16Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Mounting TypeSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionThermoplasticShell Material, FinishThermoplasticContact FinishGoldVoltage - RatedSpring ProbeVoltage - Rated250VCurrent Rating2A	Category	Connectors, Interconnects
SeriesMicro CPCConnector TypePlug, Female SocketsNumber of Positions16Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationH95 - Dust Tight, Water ResistantShell Material, FinishThermoplasticShell Material, FinishSoldarContact FinishSpring ProbeVoltage - RatedSpring ProbeCurrent Rating2A		Circular Connectors
Connector TypePlug, Female SocketsNumber of Positions16Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionThermoplasticShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Package	-
Number of Positions16Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishGoldContact FinishSpring ProbeVoltage - Rated250VCurrent Rating2A	Series	Micro CPC
Shell Size - InsertM13.5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Connector Type	Plug, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Number of Positions	16
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Shell Size - Insert	M13.5
TerminationSolder CupFastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Shell Size, MIL	-
Fastening TypeLatch LockOrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Mounting Type	Free Hanging (In-Line)
OrientationKeyedIngress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Termination	Solder Cup
Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Fastening Type	Latch Lock
Shell Material, FinishThermoplasticContact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Orientation	Keyed
Contact FinishGoldFeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Ingress Protection	IP65 - Dust Tight, Water Resistant
FeaturesSpring ProbeVoltage - Rated250VCurrent Rating2A	Shell Material, Finish	Thermoplastic
Voltage - Rated250VCurrent Rating2A	Contact Finish	Gold
Current Rating 2A	Features	Spring Probe
-	Voltage - Rated	250V
Report errors?	Current Rating	2A
		Report errors?

1445777-7 Guarantees

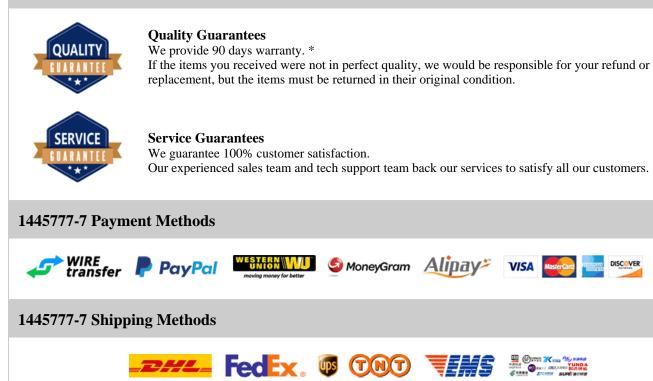

If you have any question about 1445777-7, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com