


## 150E1CL5.5

#### 150E1CL5.5 Information



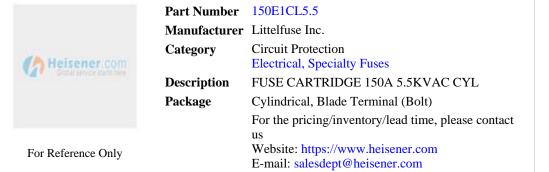

Request a Quote

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



#### 150E1CL5.5 Specifications

Manufacturer Part Number150E1CL5.5ManufacturerLittelfuse Inc.CategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageOVIR-GARD?SeriesPOWR-GARD?Fuse TypeCatridgeCurren Rating150AVoltage Rating - AC5500V (5.5kV)Voltage Rating - DC-ApplicationsTansformer ProtectionFuser TypeIndicatingClassEApprovals-Approvals-Approvals-ApprovalsStoMUMounting TypeSolM (Automation BoundPackage / CaseSidMountPackage / CaseSidMountPackage / CaseCatingale Careminal (Bolt)Stop / CaseSidMountStop / CaseSidMountPackage / CaseSidMountStop / CaseSidMountStop / CaseSidMountStop / CaseSidMount Stop / Stop		
CategoryCircuit Protection Electrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)PackagePOWR-GARD?Fuse TypeCartridgeCurrent Rating150AVoltage Rating - AC5500V (5.5kV)Voltage Rating - DC-ApplicationsTansformer ProtectionFaturesIdicatingClassEApprovals-Operating Temperature80kAMounting TypeSolt MoutPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Manufacturer Part Number	150E1CL5.5
FirstFilectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesPOWR-GARD?Fuse TypeCartridgeCurrent Rating150AVoltage Rating - AC5500V (5.5kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Manufacturer	Littelfuse Inc.
PackageCylindrical, Blade Terminal (Bolt)SeriesPOWR-GARD?Fuse TypeCartridgeCurrent RatingISOAVoltage Rating - ACS500V (5.5kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.5130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Category	Circuit Protection
SeriesPOWR-GARD?Fuse TypeCartridgeCurrent Rating150AVoltage Rating - AC5500V (5.5kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature80kAMounting TypeBolt MountPackage / CaseStol Y (1.3 L X 3.000" W x 4.310" H (384.30mm x 109.47mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeFuse Type150AVoltage Rating - AC5500V (5.5kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingOlage Name-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage80ANounting TypeSolt MountPackage / CaseCiji dirical, Blade Terminal (Bolt)Size / Dimension5.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Package	Cylindrical, Blade Terminal (Bolt)
Current Rating150AVoltage Rating - AC5500V (5.5kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical Blade Tempinal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Series	POWR-GARD?
Voltage Rating - AC5500V (5.5kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassBApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical Balde Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Current Rating	150A
Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Voltage Rating - AC	5500V (5.5kV)
ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Voltage Rating - DC	-
InFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Response Time	-
ClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Applications	Transformer Protection
Approvals-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Features	Indicating
Operating Temperature-Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Class	Ε
Breaking Capacity @ Rated Voltage80kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Approvals	_
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Breaking Capacity @ Rated Voltage	80kA
Size / Dimension 15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)	Mounting Type	Bolt Mount
	Package / Case	Cylindrical, Blade Terminal (Bolt)
Report errors?	Size / Dimension	15.130" L x 3.000" W x 4.310" H (384.30mm x 76.20mm x 109.47mm)
		Report errors?

#### 150E1CL5.5 Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### 

If you have any question about 150E1CL5.5, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com