

15220082601000

a Quote

15220082601000 Information

Container.com	Part Number	15220082601000	
	Manufacturer	HARTING	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	—————————————————————————————————————
	Description	STRAIGHT FEMALE 9.05MM	- 254
	Package	-	- Dy
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Reques
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



15220082601000 Specifications

Manufacturer Part Number15220082601000ManufacturerHARTINGCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Serieshar-flex?Connector TypeReceptacleConnector TypeFemale SocketStyleBoard to Board or CableNumber of PositionsAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSuface MountFrankation ColorSolderFrainationSolderFrainationGoldContact Finish - MatingGoldContact Finish Thickness - Mating.Contact Finish Thickness - Mating.Suldion ColorBlackInsulation Color.Suldion HeightS°C ~ 125°CMaterial Elammability RatingII.94 V.0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Serieshar-flex?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Store (25°C)-	Manufacturer Part Number	15220082601000
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Serieshar-flex?Connector TypeReceptacleContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Manufacturer	HARTING
Package-Serieshar-flex?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting Type0.050° (1.27mm)Yenning TypeSolderFarening TypeSolderFortact Finish - MatingGoldContact Finish - MatingGoldSoltact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356° (9.05mm)Contact Length - Post-Soltar Schulturg-Soltar Schulturg-Solta	Category	Connectors, Interconnects
Serieshar-flex?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFarminationSolderFortar Finsh - MatingO.050" (1.27mm)Contact Finish - MatingSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - Mating-Insulation ColorBlackInsulation Height0.356" (0.05mm)Contact Length - Post-Contact Finish Tickness - Mating-Size "0.05mm)-Contact Length - Post-Contact Finish Tickness - Mating-Size "0.05mm)-Contact Length - Post-Contact Length		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.356" (0.05mm)Contact Length - Post-Songer Space-Songer Space-Songer Space-Songer Space-Space<	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Sore - 125°C-	Series	har-flex?
StyleBoard to Board or CableNumber of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Solder-Solder Server-Solder Server- <td>Contact Type</td> <td>Female Socket</td>	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIackInsulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Solder- <td>Number of Positions</td> <td>8</td>	Number of Positions	8
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.356" (9.05mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	-
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.356" (9.05mm)
	Contact Length - Post	-
Material Flammability Rating UII 94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	10.8mm ~ 13.8mm
Ingress Protection	-
Features	Board Guide, Pick and Place, Solder Retention
	Papart amore?

Report errors?

15220082601000 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

15220082601000 Payment Methods

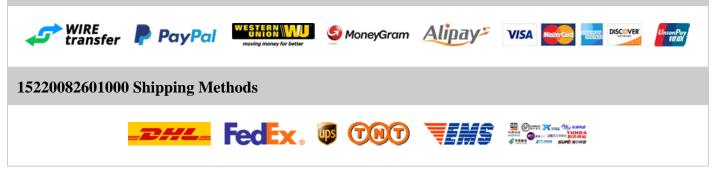

If you have any question about 15220082601000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com