

160E120

160E120 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



160E120 Specifications

| Manufacturer Part Number160E120ManufacturerHammond ManufacturingCategoryTransformersPackage-Package-Series160TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough HoleTermination StylePC Pin |
|---|
| CategoryTransformersPackage-Series160TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)DualPrimary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| NumberPower TransformersPackage-Series160TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Package-Series160TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Series160TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Voltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Voltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Current - Output (Max)Parallel 16mA, Series 8mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Primary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Secondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Center TapNoPower - Max1.2 VAMounting TypeThrough Hole |
| Power - Max1.2 VAMounting TypeThrough Hole |
| Mounting Type Through Hole |
| |
| Termination Style PC Pin |
| |
| Size / Dimension 35.05mm L x 30.23mm W |
| Height - Seated (Max) 30.99mm |
| Voltage - Isolation 2000Vrms |
| Weight 0.19 lb (86.18g) |
| Report erro |

160E120 Guarantees

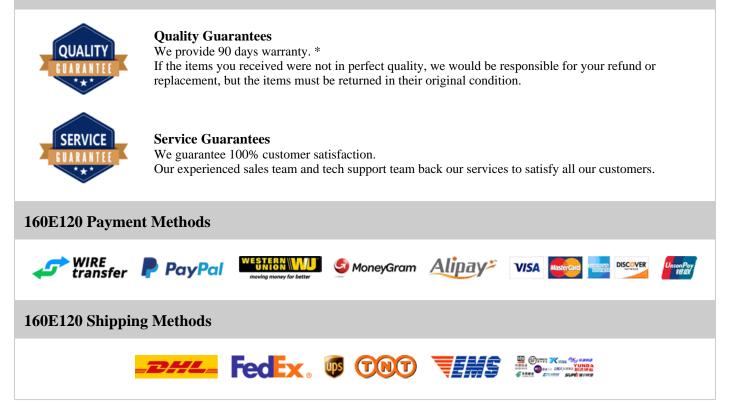

If you have any question about 160E120, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com