


162D36

162D36 Information

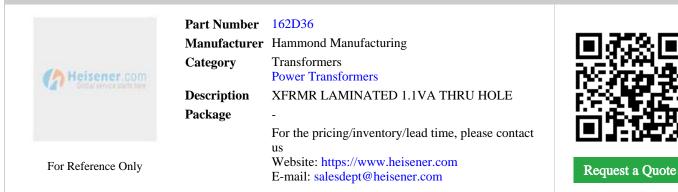

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



162D36 Specifications

Manufacturer Part Number 162D36 Manufacturer Hammond Manufacturing Category Transformers Package - Package 162 Stries Iaminated Core Yope Laminated Core Voltage - Primary Instructed Core Voltage - Secondary (Full Load) Parallel 18V, Series 36V Current - Output (Max) Parallel 60mA, Series 30mA Primary Winding(s) Dual Secondary Winding(s) Dual Power - Max I. IVA Mounting Type Proine Hole Size / Dimension 34.93mm Lx 28.58mm W Height - Sected (Max) 33.21mm Voltage - Isolation StorVrns		
CategoryTransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleSize / Dimension9C PinSize / Dimension3.32mmHeight - Seated (Max)SioVrmsWeight0.17 Ib (7.11g)	Manufacturer Part Number	162D36
Power TransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeCrongh HoleSize / DimensionS4.93mm L x 28.58mm WHeight - Seated (Max)S3.32mmVoltage - IsolationS500VrmsWeight0.17 Ib (77.11g)	Manufacturer	Hammond Manufacturing
Package-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypePrinang HoleSter / DimensionSecondary ManagementSter / Dimension3.32mmVoltage - IsolationScooVrmsWightScooVrms	Category	Transformers
Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination StyleSecondary Winding(s)Size / Dimension3.32mmHeight - Seated (Max)SizoVrmsWottge - IsolationSizoVrmsWeight0.17 lb (77.11g)		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination StyleSecondary Minding(s)Size / Dimension3.32mmHeight - Seated (Max)SooVrmsWotage - IsolationDioNrusWeight0.17 lb (77.11g)	Package	-
YVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)3500VrmsVoltage - Isolation0.17 lb (77.11g)	Series	162
Voltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Туре	Laminated Core
Current - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.22mmVoltage - Isolation500VrmsWeight0.17 lb (77.11g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)S200VrmsVoltage - Isolation0.17 lb (77.11g)	Voltage - Secondary (Full Load)	Parallel 18V, Series 36V
Secondary Winding(s)DualCenter TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Current - Output (Max)	Parallel 60mA, Series 30mA
Center TapNoPower - Max1.1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Primary Winding(s)	Dual
Power - Max1.1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Center Tap	No
Termination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Power - Max	1.1 VA
Size / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Mounting Type	Through Hole
Height - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight0.17 lb (77.11g)	Size / Dimension	34.93mm L x 28.58mm W
Weight 0.17 lb (77.11g)	Height - Seated (Max)	33.32mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.17 lb (77.11g)
		Report errors?

162D36 Guarantees

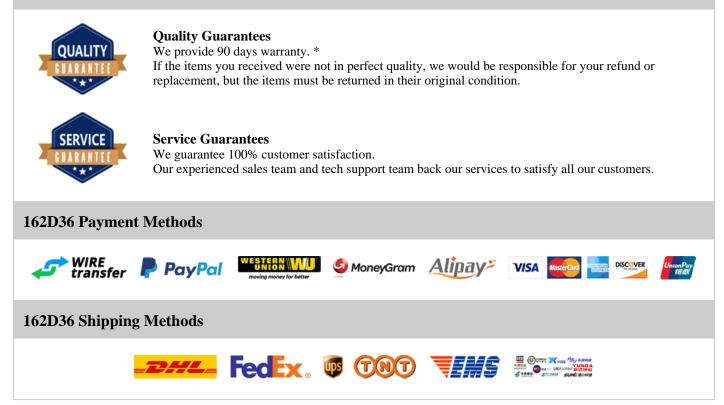

If you have any question about 162D36, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com