

162G20

162G20 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



162G20 Specifications

Manufacturer Part Number162G20ManufacturerHammond ManufacturingCategoryTransformersPower TransformersPower TransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm Lx 39.67mm WHeight - Seated (Max)38.10mmVoltage - IsolationScoolvrmsWeightColverstergers		
CategoryTransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmVoltage - IsolationSecondrum WindingWeightScondrum Winding	Manufacturer Part Number	162G20
Power TransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)SeoortmanVoltage - IsolationSoovrmsWeight0.7 Ib (317.51g)	Manufacturer	Hammond Manufacturing
Package-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / DimensionPC PinSize / Dimension38.10mmVoltage - Isolation2500VrmsWeight0.7 Ib (317.51g)	Category	Transformers
Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)500VrmsWeight0.7 lb (317.51g)		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)Se10VrmsVoltage - Isolation500VrmsWeight0.7 Ib (317.51g)	Package	-
AVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)38.10mmVoltage - Isolation0.7 Ib (317.51g)	Series	162
Voltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Туре	Laminated Core
Current - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mm VHeight - Seated (Max)SooVrmsVoltage - Isolation500VrmsWeight0.7 lb (317.51g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)S200VrmsVoltage - Isolation5200VrmsWeight0.7 lb (317.51g)	Voltage - Secondary (Full Load)	Parallel 10V, Series 20V
Secondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Current - Output (Max)	Parallel 1.2A, Series 600mA
Center TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Primary Winding(s)	Dual
Power - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Center Tap	No
Termination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Power - Max	12 VA
Size / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Mounting Type	Through Hole
Height - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Size / Dimension	47.63mm L x 39.67mm W
Weight 0.7 lb (317.51g)	Height - Seated (Max)	38.10mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.7 lb (317.51g)
		Report errors?

162G20 Guarantees

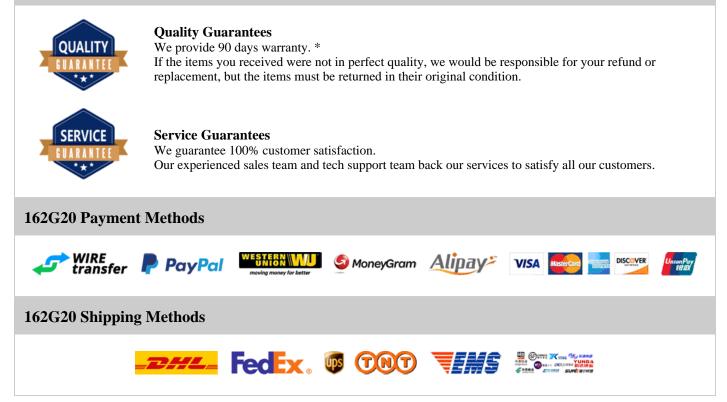

If you have any question about 162G20, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com