

1641879

1641879 Information

www.telscher.com	 1641879 Phoenix Contact Connectors, Interconnects Circular Connectors CONDUCTOR CONNECTOR 4POS - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1641879 Specifications

ManufacturerPhoenix ContactCategoryConnectors, InterconnectsCarcular ConnectorsCircular ConnectorsPackage-SeriesQPDConnector TypeDistributorNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)ForminationIDCFastening TypeThreadedShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V		
CategoryConnectors, InterconnectsCircular ConnectorsPackage-SeriesQPDConnector TypeDistributorConnector Type4Number of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypeThreadedOrientationKeyedShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Manufacturer Part Number	1641879
Circular ConnectorsPackage-SeriesQPDConnector TypeDistributorNumber of Positions4Shell Size - Insert-Shell Size, MIL-Shell Size, MILFree Hanging (In-Line)ParminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonFeatures-Voltage - Rated125V	Manufacturer	Phoenix Contact
Package-SeriesQPDConnector TypeDistributorNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Fastening TypeIDCFastening TypeKeyedOrientation1965/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonFeatures-Fortage - Rated125V	Category	Connectors, Interconnects
SeriesQPDConnector TypeDistributorNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionPolyamide (PA), NylonShell Material, FinishPolyamide (PA), NylonFeatures-Voltage - Rated125V		Circular Connectors
Connector TypeDistributorNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionPolyamide (PA), NylonShell Material, FinishTinContact FinishTinFeatures-Voltage - Rated125V	Package	-
ANumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Mounting TypeIDCFastening TypeThreadedOrientationKeyedIngress ProtectionPolyamide (PA), NylonShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Series	QPD
Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact Finish-Features-Voltage - Rated125V	Connector Type	Distributor
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)FerminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact Finish-Features-Voltage - Rated125V	Number of Positions	4
Mounting TypeFree Hanging (In-Line)TerminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Shell Size - Insert	-
TerminationIDCFastening TypeThreadedOrientationKeyedIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Shell Size, MIL	-
Fastening TypeThreadedFastening TypeKeyedOrientationKeyedIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Mounting Type	Free Hanging (In-Line)
DrientationKeyedIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Termination	IDC
InstantInstantIngress ProtectionIP65/67 - Dust Tight, Water Resistant, WaterproofShell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Fastening Type	Threaded
Shell Material, FinishPolyamide (PA), NylonContact FinishTinFeatures-Voltage - Rated125V	Orientation	Keyed
Contact FinishTinFeatures-Voltage - Rated125V	Ingress Protection	IP65/67 - Dust Tight, Water Resistant, Waterproof
Features-Voltage - Rated125V	Shell Material, Finish	Polyamide (PA), Nylon
Voltage - Rated 125V	Contact Finish	Tin
	Features	-
	Voltage - Rated	125V
Current Kating 5A	Current Rating	5A
Report errors?		Report errors?

1641879 Guarantees

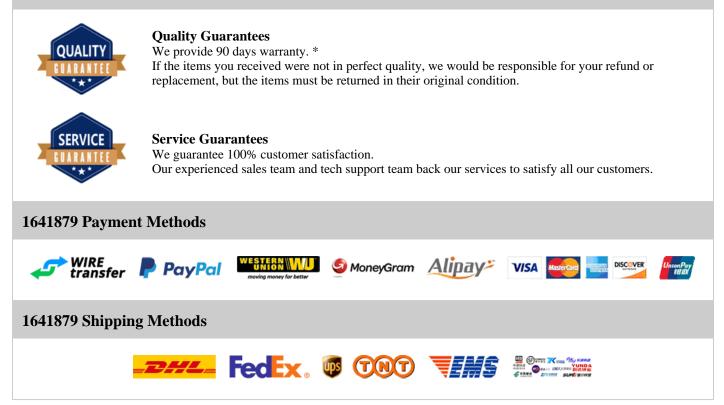

If you have any question about 1641879, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com