

164G20

164G20 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



164G20 Specifications

| Manufacturer Part Number 164G20 Manufacturer Hammond Manufacturing Category Transformers Package - Series 164 Type Laminated Core Voltage - Primary 115V Voltage - Secondary (Full Load) Parallel 10V, Series 20V Current - Output (Max) Parallel 1.2A, Series 600mA Secondary Winding(s) Single Secondary Winding(s) Dual Power - Max 12 VA Mouning Type Through Hole Size / Dimension 47.63mm Lx 39.67mm W Size / Dimension 38.10mm Voltage - Isolation StoWrms | | |
|---|---------------------------------|-----------------------------|
| CategoryTransformersPackage-Series164TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)SigoVrmsVoltage - IsolationSooVrmsWeight0.7 Ib (317.51g) | Manufacturer Part Number | 164G20 |
| Power TransformersPackage-Series164TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypePrinagh HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)SeonVrmsVoltage - IsolationSooVrmsWeight0.7 Ib (317.51g) | Manufacturer | Hammond Manufacturing |
| Package-Series164TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / DimensionPC PinSize / Dimension38.10mmVoltage - Isolation2500VrmsWeight0.71b (317.51g) | Category | Transformers |
| Series164TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm Lx 39.67mm WHeight - Seated (Max)SallommVoltage - Isolation500VrmsWeight0.7 lb (317.51g) | | Power Transformers |
| TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)SatoVrmsVoltage - Isolation500VrmsWeight0.7 Ib (317.51g) | Package | - |
| AVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mmHeight - Seated (Max)38.10mmVoltage - Isolation0.7 Ib (317.51g) | Series | 164 |
| Voltage - Secondary (Full Load)Parallel 10V, Series 20VCurrent - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Туре | Laminated Core |
| Current - Output (Max)Parallel 1.2A, Series 600mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.10mm L x 39.67mm WHeight - Seated (Max)SooVrmsVoltage - IsolationColVrmsWeight0.7 lb (317.51g) | Voltage - Primary | 115V |
| Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)S8.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Voltage - Secondary (Full Load) | Parallel 10V, Series 20V |
| Secondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Current - Output (Max) | Parallel 1.2A, Series 600mA |
| Center TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Primary Winding(s) | Single |
| Power - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Secondary Winding(s) | Dual |
| Mounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Center Tap | No |
| Termination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Power - Max | 12 VA |
| Size / Dimension 47.63mm L x 39.67mm W Height - Seated (Max) 38.10mm Voltage - Isolation 2500Vrms Weight 0.7 lb (317.51g) | Mounting Type | Through Hole |
| Height - Seated (Max)38.10mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Termination Style | PC Pin |
| Voltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Size / Dimension | 47.63mm L x 39.67mm W |
| Weight 0.7 lb (317.51g) | Height - Seated (Max) | 38.10mm |
| | Voltage - Isolation | 2500Vrms |
| Report errors? | Weight | 0.7 lb (317.51g) |
| | | Report errors? |

164G20 Guarantees

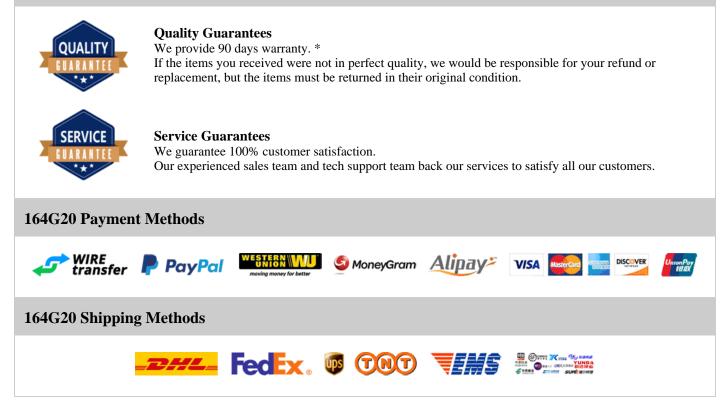

If you have any question about 164G20, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com