

167L24

167L24 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



167L24 Specifications

Manufacturer Part Number167L24ManufacturerHammond ManufacturingCategoryTransformersPackage-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)SingleSecondary Winding(s)SingleConter TapVersPower - Max48 VAMouning TypeChasis MountSize / DimensionSic SinglaSize / Dimension <th></th> <th></th>		
CategoryTransformersPackage-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)SingleSecondary Winding(s)SingleSecondary Winding(s)SingleCurter TapYesPower - Max48 VAMounting TypeChasis MountSize / Dimension5.63mm L x 66.80mm WSize / Dimension6.80mmVoltage - Isolation200VrmsWeight1.9 Ibs (861.8gs)	Manufacturer Part Number	167L24
Power TransformersPackage-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChasis MountSize / Dimension5.63mm L x 66.80mm WSize / Dimension6.80mmVoltage - Isolation900VrmsWeight1.9 Iso (861.8g)	Manufacturer	Hammond Manufacturing
Package-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SinglePower - Max48 VANouting TypeChasis MountPrimation StyleSingleSize / DimensionSice AdditionSize / DimensionSice AdditionHeight - Seated (Max)Sice AdditionWeight19 bis (861.8g)	Category	Transformers
Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)YesPower - Max48 VAMounting TypeChassis MountTermination StyleSic3mm L x 66.80mm WSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)200VrmsWeight1.9 lbs (861.8g)		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChasis MountTermination StyleSics MountSize / Dimension5.563mm L x 66.80mm WHeight - Seated (Max)6.80mmWoltage - Isolation200VrmsWeight1.9 lbs (861.8g)	Package	-
Yoltage - Primary115VVoltage - Secondary (Full Load)24VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChassis MountTermination StyleSingleSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)60.80mmWoltage - Isolation1.9 lbs (861.8gs)	Series	167
Voltage - Secondary (Full Load)24VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)600VrmsVoltage - Isolation1.9 lbs (861.8g)	Туре	Laminated Core
Current - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)60.80mmVoltage - Isolation1.9 lbs (861.8g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)2000VrmsVoltage - Isolation1.9 lbs (861.8g)	Voltage - Secondary (Full Load)	24V
Secondary Winding(s)SingleCenter TapYesPower - Max48 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)66.80mmVoltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Current - Output (Max)	2A
Center TapYesPower - Max48 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)66.80mmVoltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Primary Winding(s)	Single
Power - Max48 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)66.80mmVoltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Secondary Winding(s)	Single
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)66.80mmVoltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Center Tap	Yes
Termination StyleWire LeadsSize / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)66.80mmVoltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Power - Max	48 VA
Size / Dimension55.63mm L x 66.80mm WHeight - Seated (Max)66.80mmVoltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Mounting Type	Chassis Mount
Height - Seated (Max) 66.80mm Voltage - Isolation 2000Vrms Weight 1.9 lbs (861.8g)	Termination Style	Wire Leads
Voltage - Isolation2000VrmsWeight1.9 lbs (861.8g)	Size / Dimension	55.63mm L x 66.80mm W
Weight 1.9 lbs (861.8g)	Height - Seated (Max)	66.80mm
	Voltage - Isolation	2000Vrms
Report errors?	Weight	1.9 lbs (861.8g)
		Report errors?

167L24 Guarantees

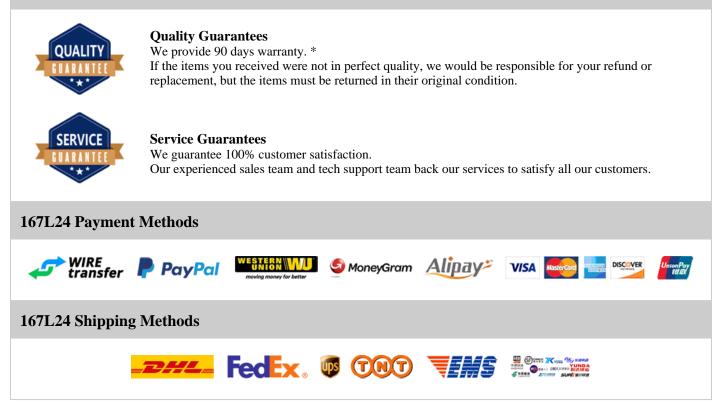

If you have any question about 167L24, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com