

167M30

167M30 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



167M30 Specifications

| Manufacturer Part Number167M30ManufacturerHammond ManufacturingCategoryTransformersPackage-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)SingleSecondary Winding(s)SingleCenter Tap90 VANounting TypeChasis MountNounting Type61350mm L x 76.20mm WNounting Type63.50mm L x 76.20mm WVoltage - Isolation90.77.2mmWire Leads90.00VSter J Dimension63.50mm L x 76.20mm WWire Loadion90.00VWire Loadion90.00VSter J Dimension63.50mm L x 76.20mm WWire Loadion90.00VWire Loadion90.00VSter J Dimension63.50mm L x 76.20mm WWire Loadion90.00VWire Loadion90.00V | | |
|--|---------------------------------|-----------------------|
| CategoryTransformersPackage-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)SingleSeriodary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChasis MountSize / Dimension63.50mm L x 76.20mm WSize / Dimension77.72mmVoltage - Isolation200VrmsWeightSoury Single | Manufacturer Part Number | 167M30 |
| Power TransformersPackage-Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChasis MountSize / Dimension63.50mm Lx 76.20mm WSize / Dimension7.72mmVoltage - Isolation200VrmsWeight2.9 lbs (1.3kg) | Manufacturer | Hammond Manufacturing |
| Package-Series67Stries67TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max00 VAMounting TypeChasis MountTermination StyleSinglenatureSteir JinnensionSinglenatureSteir JinnensionSinglenatureVoltage - IsolationSinglenatureVoltage - IsolationSinglenatureSteir JinnensionSinglenatureSteir JinnensionSinglenatureVoltage - IsolationSinglenatureVoltage - IsolationSinglenatureSteir JinnensionSinglenatureSteir JinnensionSinglenatureVoltage - IsolationSinglenatureWeightSinglenatureSteir JinnensionSinglenatureSteir Steir Ste | Category | Transformers |
| Series167TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)YesPower - Max90 VAMounting TypeChassis MountTermination StyleSi.50mm L x 76.20mm WSize / Dimension77.72mmVoltage - Isolation200VrmsWeightSunder Stale | | Power Transformers |
| TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)SinglePower - Max90 VAPower - MaxChassis MountMounting TypeKirs LeadsSize / Dimension5350mn L x 76.20mm WSize / Dimension7.72mmVoltage - Isolation200VrmsWeight2.9 lbs (1.3kg) | Package | - |
| Yoltage - Primary115VVoltage - Secondary (Full Load)30VCurrent - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChassis MountTermination StyleSingleSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmWotage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Series | 167 |
| Voltage - Secondary (Full Load)30VCurrent - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChassis MountTermination StyleSingleSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight1.3kg) | Туре | Laminated Core |
| Current - Output (Max)3APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Voltage - Primary | 115V |
| Primary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)2000VrmsVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Voltage - Secondary (Full Load) | 30V |
| Secondary Winding(s)SingleCenter TapYesPower - Max90 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Current - Output (Max) | 3A |
| Center TapYesPower - Max90 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Primary Winding(s) | Single |
| Power - Max90 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Secondary Winding(s) | Single |
| Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Center Tap | Yes |
| Termination StyleWire LeadsSize / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Power - Max | 90 VA |
| Size / Dimension63.50mm L x 76.20mm WHeight - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Mounting Type | Chassis Mount |
| Height - Seated (Max)77.72mmVoltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Termination Style | Wire Leads |
| Voltage - Isolation2000VrmsWeight2.9 lbs (1.3kg) | Size / Dimension | 63.50mm L x 76.20mm W |
| Weight 2.9 lbs (1.3kg) | Height - Seated (Max) | 77.72mm |
| | Voltage - Isolation | 2000Vrms |
| Report errors? | Weight | 2.9 lbs (1.3kg) |
| | | Report errors? |

167M30 Guarantees

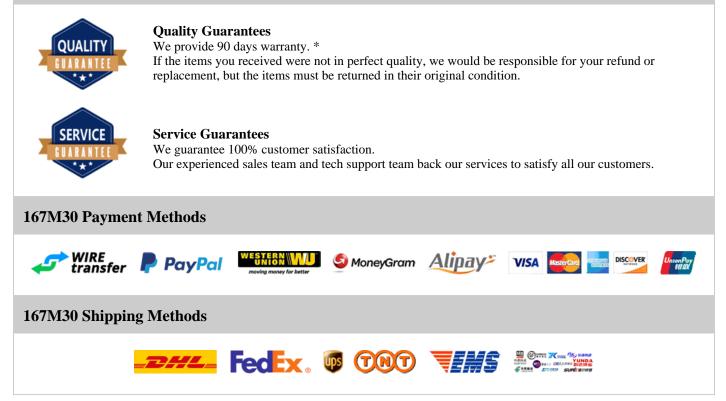

If you have any question about 167M30, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com