

1702109

1702109 Information

Heisener.com	Part Number	1702109
	Manufacturer	Phoenix Contact
	Category	Connectors, Interconnects Terminal Blocks - Panel Mount
	Description	TERM BLK HDR 3POS 2PC SNAP GREEN
	Package	-
		For the pricing/inventory/lead time, please contact
For Reference Only		us
		Website: https://www.heisener.com
		E-mail: salesdept@heisener.com

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




Request a Quote

1702109 Specifications

Manufacturer Part Number 1702109 Manufacturer Phoenix Contact Category Connectors, Interconnects Terminal Blocks - Panel Mount Terminal Blocks - Panel Mount Package - Series COMBICON DFK-PCV Front Panel Wire Connection Header, Male Pins Rear Panel Wire Connection PCB Pins - Straight Width 1.965" (49.92mm) Panel Thickness 0.039 ~ 0.118" (1.0 ~ 3.0mm) Positions Per Level 3 Panel Mount Type 2 Piece, Snap Lock Pitch 0.400" (10.16mm) Vire Gauge - Color Green Fatures - Number of Levels 1		
CategoryConnectors, Interconnects Terminal Blocks - Panel MountPackage-Package-SeriesCOMBICON DFK-PCVFornt Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - StraightWidth1.965" (49.92mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level3Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Manufacturer Part Number	1702109
ImageImagePackage-SeriesCOMBICON DFK-PCVFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionOB Pins - StraightWidth1.965" (49.92mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level3Panel Mount Type0.400" (10.16mm)Pich0.400" (10.16mm)Vidtage - ULSACurrent - ULSAVire GaugeCreenFotarusStensenFotarusImageStensenStens	Manufacturer	Phoenix Contact
Package-SeriesCOMBICON DFK-PCVFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - StraightWidth1,965" (49.92mm)Yold Pins Parle Vier Connection0.039 ~ 0.118" (1.0 ~ 3.0mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level2 Piece, Snap LockPinel Mount Type0.400" (10.16mm)Vidtage - UL600VCurrent - UL5AVier Gauge-ColorGreenFeatures-Number of Levels1	Category	Connectors, Interconnects
SeriesCOMBICON DFK-PCVFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - StraightWidth1.965" (49.92mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level3Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL5ACurrent - UL5AWire Gauge-Features-Features-Number of Levels1		Terminal Blocks - Panel Mount
Front Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - StraightWidth1.965" (49.92mm)Width0.039 ~ 0.118" (1.0 ~ 3.0mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level3Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Package	-
Rear Panel Wire ConnectionPCB Pins - StraightWidth1.965" (49.92mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level3Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Series	COMBICON DFK-PCV
Width 1.965" (49.92mm) Panel Thickness 0.039 ~ 0.118" (1.0 ~ 3.0mm) Positions Per Level 3 Panel Mount Type 2 Piece, Snap Lock Pitch 0.400" (10.16mm) Voltage - UL 600V Current - UL 5A Wire Gauge - Foatures Green Foatures - Number of Levels 1	Front Panel Wire Connection	Header, Male Pins
Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level3Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Rear Panel Wire Connection	PCB Pins - Straight
Positions Per Level3Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Width	1.965" (49.92mm)
Panel Mount Type2 Piece, Snap LockPitch0.400" (10.16mm)Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Panel Thickness	0.039 ~ 0.118" (1.0 ~ 3.0mm)
Pitch 0.400" (10.16mm) Voltage - UL 600V Current - UL 5A Wire Gauge - Color Green Features - Number of Levels 1	Positions Per Level	3
Voltage - UL600VCurrent - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Panel Mount Type	2 Piece, Snap Lock
Current - UL5AWire Gauge-ColorGreenFeatures-Number of Levels1	Pitch	0.400" (10.16mm)
Wire Gauge-ColorGreenFeatures-Number of Levels1	Voltage - UL	600V
ColorGreenFeatures-Number of Levels1	Current - UL	5A
Features-Number of Levels1	Wire Gauge	-
Number of Levels 1	Color	Green
	Features	-
Report errors?	Number of Levels	1
		Report errors?

1702109 Guarantees

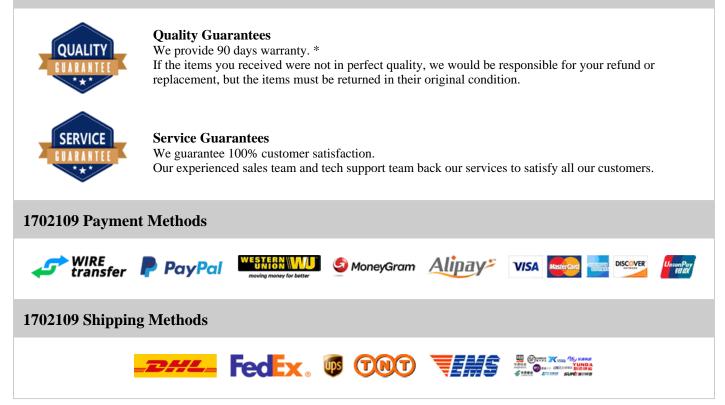

If you have any question about 1702109, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com