

170M6062

170M6062 Information



For Reference Only

Part Number	170M6062	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE SQ 800A 700VAC RECTANGULAR	
Package	Rectangular, Blade	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



170M6062 Specifications

Manufacturer Part Number170M6662ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageRectangular, BladeSeries-Fuse TypeSquareCurrent Rating800AVoltage Rating - DC-Voltage Rating - DC-ApplicationsElectrical, IndustrialApprovalsElectrical, IndustrialClass-ApprovalsCF, CSA, UROperating TypeSold AMouning TypeBiol MountPackage / CaseSold AStering TypeSold AStering TypeSold AApprovalsCF, CSA, URApprovalsSold AMouning TypeBiol MountPackage / CaseSold AStering TypeSold AStering TypeSold AMouning TypeSold NStering TypeSold N </th <th></th> <th></th>		
CategoryCircuit Protection Electrical, Specialty FusesPackageRectangular, BladeSeries-Fuse TypeSquareCurrent Rating800AVoltage Rating - AC700VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm)	Manufacturer Part Number	170M6062
Field of the second s	Manufacturer	Eaton
PackageRectangular, BladeSeries-Fuse TypeSquareFuse TypeSquareCurrent Rating800AVoltage Rating - AC700VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Anonting TypeBolt MountHounting TypeSch UMAPackage / CaseRectangulangleSize / Dimension2,008" L x 2,992" W x 3,543" H (51.00mm x 90.00mm)	Category	Circuit Protection
Series-Fuse TypeSquareCurrent Rating800AVoltage Rating - AC700VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature900ABreaking Capacity @ Rated Voltage200AAMounting TypeBolt MountPackage / CaseScongular, BladeSize / Dimension2,008" L x 2,992" W x 3,543" H (51,00mm x 76,00mm x 90,00mm)		Electrical, Specialty Fuses
Fuse TypeSquareFuse TypeSquareCurrent RatingS00AVoltage Rating - AC700VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature200AFeatures200AAMounting TypeBol MountPackage / CaseRectangual BalandSize / Dimension2008" L x 2.992" W x 3.543" H (51.00mm x 90.00mm)	Package	Rectangular, Blade
Current Rating800AVoltage Rating - AC700VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated VoltageBolt MountPackage / CaseScottagualSize / Dimension2008" L x 2.992" W x 3.543" H (51.00mm x 90.00mm)	Series	-
Voltage Rating - AC700VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated VoltageBolt MountMounting TypeBolt MountPackage / Case.Size / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Fuse Type	Square
Voltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00m x 76.00m x 90.00m x	Current Rating	800A
Response Time-ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2,008" L x 2,992" W x 3,543" H (51,00m x 76,00m x 90,00m x 90	Voltage Rating - AC	700V
ApplicationsElectrical, IndustrialFeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Voltage Rating - DC	-
FeaturesIndicatingClass-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Response Time	-
Class-ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Features	Indicating
Operating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Class	-
Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Approvals	CE, CSA, UR
Mounting TypeBolt MountPackage / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Operating Temperature	-
Package / CaseRectangular, BladeSize / Dimension2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Breaking Capacity @ Rated Voltage	200kA
Size / Dimension 2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)	Mounting Type	Bolt Mount
	Package / Case	Rectangular, Blade
Report errors?	Size / Dimension	2.008" L x 2.992" W x 3.543" H (51.00mm x 76.00mm x 90.00mm)
		Report errors?

170M6062 Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

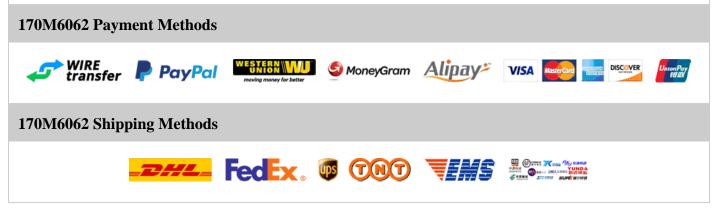

If you have any question about 170M6062, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com