


# 172-E09-102-911

### 172-E09-102-911 Information

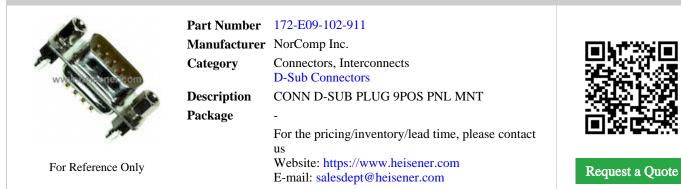

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 172-E09-102-911 Specifications

Manufacturer NorComp Inc.   Category Connectors, Interconnects   D-Sub Connectors D-Sub Connectors   Package -   Series 172-E   Connector Style D-Sub Connectors   Connector Type Plug, Male Pins   Number of Positions 9   Number of Rows 2   Shell Size, Connector Layout 1 (DE, E)   Contact Type Signal   Mounting Type Panel Mount   Flange Feature Colle Side (4-40); Mating Side, Female Screwlock (4-40)   Flange Feature Solder Cup   Features Board Lock, Grounding Indents   Shell Material, Finish Stel, Tin Plated   Contact Finish Thickness Fold   Agense Protection Flash   Material Flammability Rating UL94 V-0		
CategoryConnectors, InterconnectsD-Sub ConnectorsPackage-Series172-EConnector StyleD-SubConnector TypePlug, Male PinsNumber of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureCable Stide (4-40); Mating Side, Female Screwlock (4-40)FeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Manufacturer Part Number	172-E09-102-911
D-Sub ConnectorsPackage-Series172-EConnector StyleD-SubConnector TypePlug, Male PinsNumber of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)Flange FeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Manufacturer	NorComp Inc.
Package-Series172-EConnector StyleD-SubConnector TypePlug, Male PinsNumber of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureColde Cidy (Mating Side, Female Screwlock (4-40))Flange FeaturesBoard Lock, Grounding IndentsShell Material, FinishSiel, Tin PlatedContact FinishGoldContact Finish ThicknessFashIngress Protection-Material Flammability RatingUL94 V-0	Category	Connectors, Interconnects
Series172-EConnector StyleD-SubConnector TypePlug, Male PinsNumber of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureColder CupShell Material, FinishSteel, Cin PlatedShell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flanmability RatingUL94 V-0		D-Sub Connectors
Connector StyleD-SubConnector TypePlug, Male PinsNumber of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlarge FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)FeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Package	-
Connector TypePlug, Male PinsNumber of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldIngress Protection-Material Flammability RatingUL94 V-0	Series	172-Е
Number of Positions9Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Connector Style	D-Sub
Number of Rows2Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Connector Type	Plug, Male Pins
Shell Size, Connector Layout1 (DE, E)Contact TypeSignalMounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Number of Positions	9
Contact TypeSignalMounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Number of Rows	2
Mounting TypePanel MountFlange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Shell Size, Connector Layout	1 (DE, E)
Flange FeatureCable Side (4-40); Mating Side, Female Screwlock (4-40)TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Contact Type	Signal
TerminationSolder CupFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Mounting Type	Panel Mount
FeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Flange Feature	Cable Side (4-40); Mating Side, Female Screwlock (4-40)
Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Termination	Solder Cup
Contact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Features	Board Lock, Grounding Indents
Contact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Shell Material, Finish	Steel, Tin Plated
Ingress Protection-Material Flammability RatingUL94 V-0	Contact Finish	Gold
Material Flammability Rating UL94 V-0	Contact Finish Thickness	Flash
	Ingress Protection	-
Report errors?	Material Flammability Rating	UL94 V-0
		Report errors?

#### 172-E09-102-911 Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### 172-E09-102-911 Payment Methods



## 172-E09-102-911 Shipping Methods



If you have any question about 172-E09-102-911, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com