

1727715

1727715 Information

Heisener.com	Part Number Manufacturer Category Description Package	1727715 Phoenix Contact Connectors, Interconnects Terminal Blocks - Panel Mount TERM BLK HDR 4POS 2PC SNAP GREEN - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1727715 Specifications

CategoryConnectors, Interconnects Terminal Blocks - Panel MountPackage-SeriesCOMBICON DFK-PCFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeatures1treaded Mating Lock, Shield Connection Front SideNumber of Levels1		
CategoryConnectors, Interconnects Terminal Blocks - Panel MountPackage-SeriesCOMBICON DFK-PCFont Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFatures1treaded Mating Lock, Shield Connection Front SideNumber of Levels1	Manufacturer Part Number	1727715
Terminal Blocks - Panel MountPackage-SeriesCOMBICON DFK-PCFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Manufacturer	Phoenix Contact
Package-SeriesCOMBICON DFK-PCFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-FeaturesGreenFunded Mating Lock, Shield Connection Front SideNumber of Levels1	Category	Connectors, Interconnects
SeriesCOMBICON DFK-PCFront Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-FeaturesGreenFunded Mating Lock, Shield Connection Front SideNumber of Levels1		Terminal Blocks - Panel Mount
Front Panel Wire ConnectionHeader, Male PinsRear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeatures1Number of Levels1	Package	-
Rear Panel Wire ConnectionPCB Pins - Right AngleWidth2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Series	COMBICON DFK-PC
Width2.563" (65.10mm)Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Front Panel Wire Connection	Header, Male Pins
Panel Thickness0.039 ~ 0.118" (1.0 ~ 3.0mm)Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Rear Panel Wire Connection	PCB Pins - Right Angle
Positions Per Level4Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Width	2.563" (65.10mm)
Panel Mount Type2 Piece, Snap Lock - Front FlangePitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Panel Thickness	0.039 ~ 0.118" (1.0 ~ 3.0mm)
Pitch0.300" (7.62mm)Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Positions Per Level	4
Voltage - UL300VCurrent - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Panel Mount Type	2 Piece, Snap Lock - Front Flange
Current - UL41AWire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Pitch	0.300" (7.62mm)
Wire Gauge-ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Voltage - UL	300V
ColorGreenFeaturesThreaded Mating Lock, Shield Connection Front SideNumber of Levels1	Current - UL	41A
Features Threaded Mating Lock, Shield Connection Front Side Number of Levels 1	Wire Gauge	-
Number of Levels 1	Color	Green
	Features	Threaded Mating Lock, Shield Connection Front Side
Report errors?	Number of Levels	1
		Report errors?

1727715 Guarantees

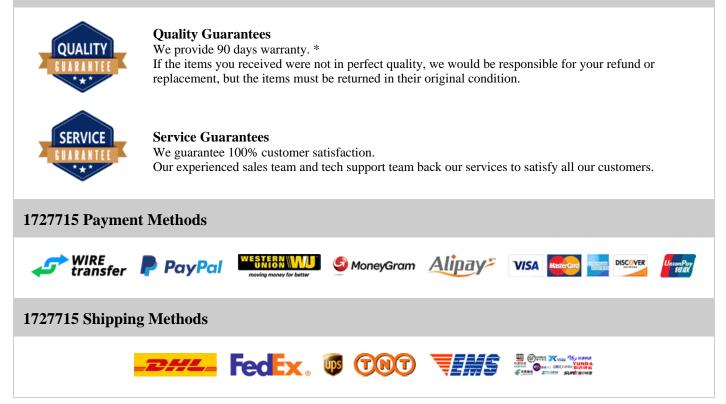

If you have any question about 1727715, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com