


187D16

187D16 Information

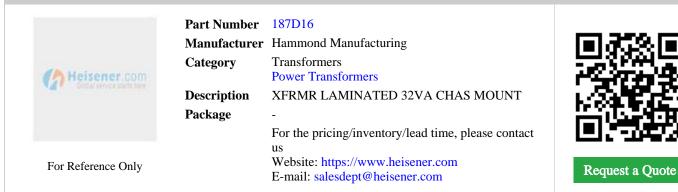

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



187D16 Specifications

Manufacturer Part Number187D16ManufacturerHammond ManufacturingCategoryTransformersPower TransformersPower TransformersPackage-Series187TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeSolder, Quick ConnectSize / DimensionSicel Scondary Winding(s)Sider, Quick ConnectSicel Scondary Winding(s)Sider, Quick ConnectSicel Scondary Winding SiSider, DimensionSicel Scondary Winding SiSize / DimensionS		
CategoryTransformersPackage-Series187TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)SingleSecondary Winding(s)SingleSecondary Winding(s)SingleCurter TapYesPower - Max32 VAMounting TypeChasis MountSize / DimensionSolder, Quick ConnectSize / Dimension8.55mm L x 52.20mm WHeight - Seated (Max)200VrmsWeight1.1bs (499g)	Manufacturer Part Number	187D16
Power TransformersPackage-Series187TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChasis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)200VrmsWeight1.1 bs (499g)	Manufacturer	Hammond Manufacturing
Package-Series187TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SinglePower - Max22 VANouting TypeClarest MountFermination StyleSolder, Quick ConnectSize / Dimension8.55mm L x 52.20mm WHeight - Seated (Max)9.00VrmsWeight1.1bs (499g)	Category	Transformers
Series187TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChassis MountFermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)900VrmsWeight1.1 lbs (499g)		Power Transformers
TypeLaminated CoreYoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChasis MountTermination StyleSolder, Quick ConnectSize / Dimension49.02mmHeight - Seated (Max)49.02mmWeight1.1 lbs (499g)	Package	-
YeInstrumentVoltage - Primary115VVoltage - Secondary (Full Load)16VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Series	187
Voltage - Secondary (Full Load)16VCurrent - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation1.1 lbs (499g)	Туре	Laminated Core
Current - Output (Max)2APrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)900VrmsVoltage - Isolation1.1 lbs (499g)	Voltage - Secondary (Full Load)	16V
Secondary Winding(s)SingleCenter TapYesPower - Max32 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Current - Output (Max)	2A
Center TapYesPower - Max32 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Primary Winding(s)	Single
Power - Max32 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Secondary Winding(s)	Single
Mounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Center Tap	Yes
Termination StyleSolder, Quick ConnectSize / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Power - Max	32 VA
Size / Dimension82.55mm L x 52.20mm WHeight - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Mounting Type	Chassis Mount
Height - Seated (Max)49.02mmVoltage - Isolation2000VrmsWeight1.1 lbs (499g)	Termination Style	Solder, Quick Connect
Voltage - Isolation2000VrmsWeight1.1 lbs (499g)	Size / Dimension	82.55mm L x 52.20mm W
Weight 1.1 lbs (499g)	Height - Seated (Max)	49.02mm
-	Voltage - Isolation	2000Vrms
Report errors?	Weight	1.1 lbs (499g)
		Report errors?

187D16 Guarantees

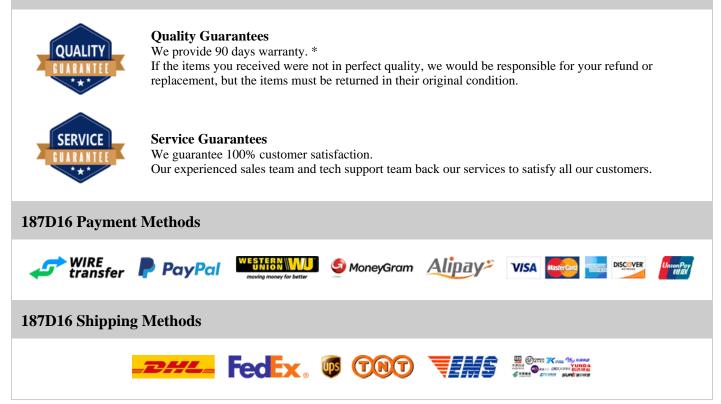

If you have any question about 187D16, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com