

1967-2

1967-2 Information

www.heitener.com	Part Number	1967-2
	Manufacturer	Keystone Electronics
	Category	Connectors, Interconnects Terminals - PC Pin, Single Post Connectors
	Description	CONN PC PIN CIRC 0.017DIA GOLD
	Package	-
		For the pricing/inventory/lead time, please contact
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




equest a Quote

1967-2 Specifications

Manufacturer Keystone Electronics Connectors, Interconnects Terminals - PC Pin, Single Post Connectors Package - Series - Terminal Style PC Pin Terminal Style Single End Pin Size - Above Flange 0.017" (0.43mm) Dia Pin Size - Below Flange 0.156" (3.96mm) Length - Above Flange 0.528" (2.08mm) Length - Overall 0.028" (2.08mm) Pin Size - Below Flange 0.052" (1.32mm) Length - Overall 0.052" (1.32mm) Mounting Type Through Hole Mounting Type Swage Termination Swage Insulation Non-Insulated Board Thickness 0.062" (1.57mm) Contact Material Brass		
CategoryConnectors, InterconnectsPackage-Package-Series-Terminal TypePC PinTerminal StyleSingle EndPin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange0.156" (3.96mm)Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Flange Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact Finish ThicknessGoldContact Finish ThicknessJujin (0.25µm)	Manufacturer Part Number	1967-2
Terminals - PC Pin, Single Post ConnectorsPackage-Series-Terminal TypePC PinTerminal StyleSingle EndPin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange0.156" (3.96mm)Length - Above Flange0.156" (3.96mm)Length - Below Flange0.268" (6.81mm)Length - Overall0.268" (6.81mm)Flange Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact Finish ThicknessGoldContact Finish ThicknessIupin (0.25µm)	Manufacturer	Keystone Electronics
Package-Series-Terminal TypePC PinTerminal StyleSingle EndPin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange-Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.028" (6.81mm)Flange Diameter0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleInsulationSwageInsulation0.062" (1.57mm)Contact MaterialGoldContact Finish ThicknessGoldContact Finish Thickness1/µin (0.25µm)	Category	Connectors, Interconnects
Series-Terminal TypePC PinTerminal StyleSingle EndPin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange-Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Flange Diameter0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleInsulationSwageInsulation0.062" (1.57mm)Contact MaterialGoldContact Finish ThicknessIoµin (0.25µm)		Terminals - PC Pin, Single Post Connectors
Terminal TypePC PinTerminal StyleSingle EndPin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange-Length - Above Flange0.156" (3.96mm)Length - Above Flange0.082" (2.08mm)Length - Overall0.068" (6.81mm)Length - Overall0.078" (1.98mm)Mounting Hole Diameter0.0052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulation0.062" (1.57mm)Board Thickness0.062" (1.57mm)Contact FinishGoldContact Finish Thickness10µin (0.25µm)	Package	-
Terminal StyleSingle EndPin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange-Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Length - Overall0.078" (1.98mm)Mounting Hole Diameter0.075" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialGoldContact Finish Thickness10µin (0.25µm)	Series	-
Pin Size - Above Flange0.017" (0.43mm) DiaPin Size - Below Flange-Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Longth - Overall0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulation0.062" (1.57mm)Board Thickness0.062" (1.57mm)Contact MaterialGoldContact FinishGoldLongth - Diameter10µin (0.25µm)	Terminal Type	PC Pin
Pin Size - Below Flange-Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Length - Overall0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulation0.062" (1.57mm)Board Thickness0.062" (1.57mm)Contact MaterialBrassContact Finish ThicknessIoµin (0.25µm)	Terminal Style	Single End
Length - Above Flange0.156" (3.96mm)Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Flange Diameter0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialGoldContact Finish Thickness10µin (0.25µm)	Pin Size - Above Flange	0.017" (0.43mm) Dia
Length - Below Flange0.082" (2.08mm)Length - Overall0.268" (6.81mm)Flange Diameter0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact Finish ThicknessGoldInsulationJupin (0.25µm)	Pin Size - Below Flange	-
Length - Overall0.268" (6.81mm)Flange Diameter0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldInsulation10µin (0.25µm)	Length - Above Flange	0.156" (3.96mm)
Flange Diameter0.078" (1.98mm)Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldInsulationInpuin (0.25µm)	Length - Below Flange	0.082" (2.08mm)
Mounting Hole Diameter0.052" (1.32mm)Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldLouin (0.25µm)10µin (0.25µm)	Length - Overall	0.268" (6.81mm)
Mounting TypeThrough HoleTerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldContact Finish Thickness10µin (0.25µm)	Flange Diameter	0.078" (1.98mm)
TerminationSwageInsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldContact Finish Thickness10µin (0.25µm)	Mounting Hole Diameter	0.052" (1.32mm)
InsulationNon-InsulatedBoard Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldContact Finish Thickness10µin (0.25µm)	Mounting Type	Through Hole
Board Thickness0.062" (1.57mm)Contact MaterialBrassContact FinishGoldContact Finish Thickness10µin (0.25µm)	Termination	Swage
Contact MaterialBrassContact FinishGoldContact Finish Thickness10µin (0.25µm)	Insulation	Non-Insulated
Contact FinishGoldContact Finish Thickness10µin (0.25µm)	Board Thickness	0.062" (1.57mm)
Contact Finish Thickness 10µin (0.25µm)	Contact Material	Brass
	Contact Finish	Gold
Report errors?	Contact Finish Thickness	10μin (0.25μm)
		Report errors?

1967-2 Guarantees

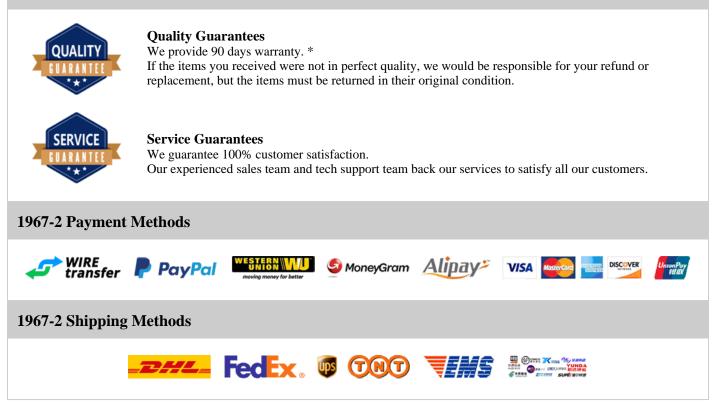

If you have any question about 1967-2, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com