


2000975

2000975 Information



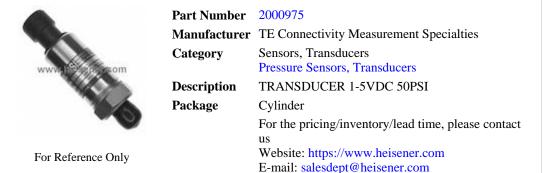

Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



2000975 Specifications

Manufacturer Part Number 2000975 Manufacturer TE Connectivity Measurement Specialties Category Sensors, Transducers Package Cylinder Package Cylinder Series MSP600 Operating Pressure So PSI (344.74 kPa) Output Type Analog Voltage Output Type Analog Voltage Output Type Analog Voltage Output Type 10 V ~ 5 V Accuracy 4025% Voltage - Supply I0 V ~ 30 V Port Style Threaded Features Amplified Output, Temperature Compensated Querating Temperature 40°C ~ 100°C Package / Case Cylinder		
CategorySensors, TransducersPackageCylinderPackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating Pressure50 PSI (344.74 kPa)Output TypeAnalog VoltageOutput Type1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort SiyleThreadedFeaturesAmplified Output, Temperature CompensatedConnector100 PSI (689.48 kPa)Operating Temperature-00°C ~ 100°CPackage / CasecylinderSupplier Device Package-	Manufacturer Part Number	2000975
Pressure Sensors, TransducersPackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating Pressure50 PSI (344.74 kPa)Output TypeAnalog VoltageOutput Type1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / Case-Supplier Device Package-	Manufacturer	TE Connectivity Measurement Specialties
PackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating PressureS0 PSI (344.74 kPa)Output TypeAnalog VoltageOutput Type1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort SyleThreadedFeaturesAmplified Output, Temperature CompensatedMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / Casec, indexSupplier Device Package-	Category	Sensors, Transducers
SeriesMSP600Pressure TypeVented GaugeOperating Pressure50 PSI (344.74 kPa)Output TypeAnalog VoltageOutput Type1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-		Pressure Sensors, Transducers
Pressure TypeVented GaugeOperating Pressure50 PSI (344.74 kPa)Output TypeAnalog VoltageOutput Que1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CasecylinderSupplier Device Package-	Package	Cylinder
Operating Pressure50 PSI (344.74 kPa)Output TypeAnalog VoltageOutput1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Series	MSP600
Output TypeAnalog VoltageOutput1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Pressure Type	Vented Gauge
Output1 V ~ 5 VAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Operating Pressure	50 PSI (344.74 kPa)
Accuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Output Type	Analog Voltage
Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Output	1 V ~ 5 V
Port SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Accuracy	±0.25%
Port StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Voltage - Supply	10 V ~ 30 V
FeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Port Size	Male - 7/16" (11.11mm) UNF
Termination StyleConnectorMaximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Port Style	Threaded
Maximum Pressure100 PSI (689.48 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Features	Amplified Output, Temperature Compensated
Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Termination Style	Connector
Package / Case Cylinder Supplier Device Package -	Maximum Pressure	100 PSI (689.48 kPa)
Supplier Device Package -	Operating Temperature	-40°C ~ 100°C
	Package / Case	Cylinder
Report errors?	Supplier Device Package	-
Report crois.		Report errors?

2000975 Guarantees

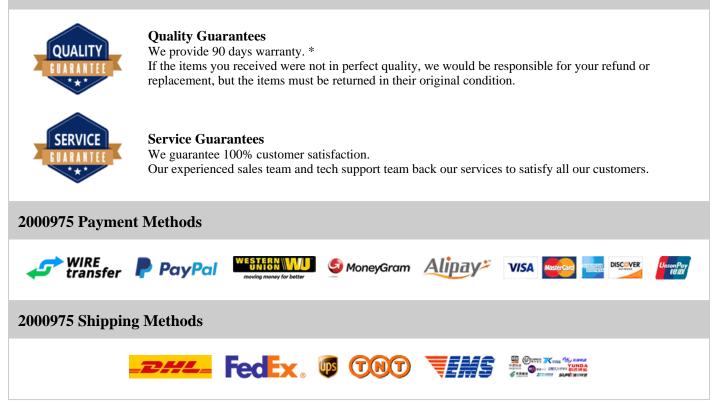

If you have any question about 2000975, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com