

2000987

## 2000987 Information



2000987
TE Connectivity Measurement Specialties
Sensors, Transducers Pressure Sensors, Transducers
TRANSDUCER 4-20MA 100PSI
Cylinder
For the pricing/inventory/lead time, please contact
us
Website: https://www.heisener.com
E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 2000987 Specifications

ManufacturerTE Connectivity Measurement SpecialtiesCategorySensors, TransducersPressure Sensors, TransducersPackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput Type4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style200 PSI (1378.95 kPa)Operating Temperature-200°CPackage / CaseCylinder		
CategorySensors, TransducersPackageCylinderPackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput Type4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Manufacturer Part Number	2000987
Pressure Sensors, TransducersPackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput Type4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedTermination Style200 PSI (1378.95 kPa)Operating Temperature200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CasecylinderSupplier Device Package-	Manufacturer	TE Connectivity Measurement Specialties
PackageCylinderSeriesMSP600Pressure TypeVented GaugeOperating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput Type4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CasecylinderSupplier Device Package-	Category	Sensors, Transducers
SeriesMSP600Pressure TypeVented GaugeOperating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput Output4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-		Pressure Sensors, Transducers
Pressure TypeVented GaugeOperating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput Quest4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style200 PSI (1378.95 kPa)Operating Temperature40°C ~ 100°CPackage / CasecylinderSupplier Device Package-	Package	Cylinder
Operating Pressure100 PSI (689.48 kPa)Output TypeAnalog CurrentOutput4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination Style200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Series	MSP600
Output TypeAnalog CurrentOutput Type4 mA ~ 20 mAOutput4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Pressure Type	Vented Gauge
Output4 mA ~ 20 mAAccuracy±0.25%Voltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Operating Pressure	100 PSI (689.48 kPa)
Accuracy±0.25%Accuracy10 V ~ 30 VVoltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinder	Output Type	Analog Current
Yoltage - Supply10 V ~ 30 VPort SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Output	4 mA ~ 20 mA
Port SizeMale - 7/16" (11.11mm) UNFPort StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Accuracy	±0.25%
Port StyleThreadedFeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Voltage - Supply	10 V ~ 30 V
FeaturesAmplified Output, Temperature CompensatedTermination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Port Size	Male - 7/16" (11.11mm) UNF
Termination StyleConnectorMaximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Port Style	Threaded
Maximum Pressure200 PSI (1378.95 kPa)Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Features	Amplified Output, Temperature Compensated
Operating Temperature-40°C ~ 100°CPackage / CaseCylinderSupplier Device Package-	Termination Style	Connector
Package / Case Cylinder   Supplier Device Package -	Maximum Pressure	200 PSI (1378.95 kPa)
Supplier Device Package -	Operating Temperature	-40°C ~ 100°C
	Package / Case	Cylinder
Report errors?	Supplier Device Package	-
		Report errors?

## 2000987 Guarantees

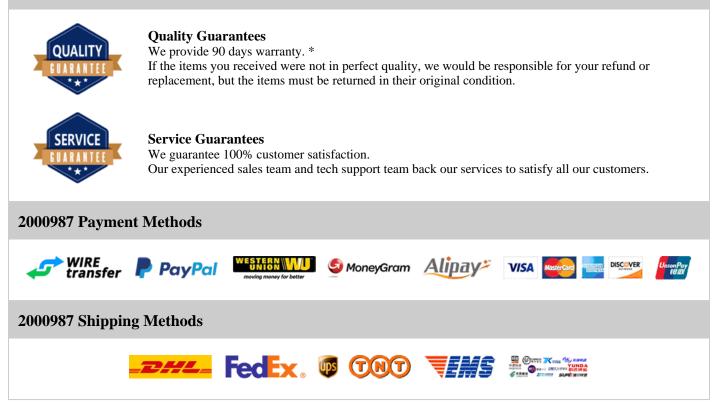

If you have any question about 2000987, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com