

20021321-00038T4LF

20021321-00038T4LF Information

Heisener.com		20021321-00038T4LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 38POS SMD GOLD	
	Package	-	前於金蝶
For Reference Only	-	For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



20021321-00038T4LF Specifications

Manufacturer Part Number20021321-00038T4LFManufacturerAmphenol FCICategoryConnectors, InterconnectsPackage-Package-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSuface MountFerminationSolderFerminationGoldFontact Finish - MatingGoldIonate Finish - MatingGoldIonate Finish Thickness - MatingIonato (2.5µm)Ionate Finish Thickness - MatingIonato (2.5µm)		
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFerninationSolderFerninationGoldContact Finish - MatingOju (0.25µm)	Manufacturer Part Number	20021321-00038T4LF
PackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Manufacturer	Amphenol FCI
Package-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSurface MountFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)	Category	Connectors, Interconnects
SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderFastening TypeGoldContact Finish - MatingGoldLonder Finish Thickness - Mating10µin (0.25µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldLonder Finish Thickness - Mating10µin (0.25µm)	Series	Minitek 127? 20021321
StyleBoard to BoardNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationSurface MountFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Connector Type	Receptacle
Number of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating10µin (0.25µm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating10µin (0.25µm)	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions	38
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)	Termination	Solder
Contact Finish Thickness - Mating 10µin (0.25µm)	Fastening Type	Push-Pull
	Contact Finish - Mating	Gold
Insulation Color Black	Contact Finish Thickness - Mating	10µin (0.25µm)
	Insulation Color	Black
Insulation Height 0.177" (4.50mm)	Insulation Height	0.177" (4.50mm)
Contact Length - Post -	Contact Length - Post	-
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	$-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

20021321-00038T4LF Payment Methods

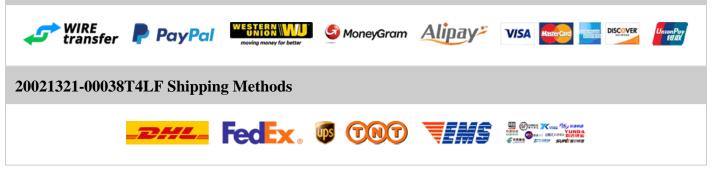

If you have any question about 20021321-00038T4LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com