

20021321-00044C1LF

20021321-00044C1LF Information

Heisener.com	 20021321-00044C1LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 44POS SMD GOLD	
For Reference Only	For the pricing/inventory/lead time, please contact us	
	Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



20021321-00044C1LF Specifications

Manufacturer Part Number20021321-00044C1LFManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-ScriesMinitek 127? 20021321Connector TypeReceptacles, Female SocketsContact TypeReceptacleContact TypeBoard to BoardStyleBoard to BoardNumber of Positions44Number of Positions LoadedNuffer AlexanderNumber of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFreminationSolderTornat Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldState IndignationGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJurit (4.50mm)Contact Finish - MatingJurit (4.50mm)Contact Finish - MatingMinitek IS2Contact Finish - MatingMinitek IS2Contact Finish - MatingMinitek IS2Contact Finish TypeJurit (4.50mm)Contact Finish TypeJurit (4.50mm)Contact Finish - MatingMinitek IS2Contact Finish FinishMinitek IS2		
CategoryConectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypeSurface MountContact Finish - MatingOlujn (0.25µm)Contact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Manufacturer Part Number	20021321-00044C1LF
Package.SeriesMinick 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Contact Finish Thickness - MatingJujin (0.25µm)Contact Finish Thickness - MatingJujin (0.25µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Manufacturer	Amphenol FCI
Package-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)Yenning TypeSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Category	Connectors, Interconnects
SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingBiackInsulation ColorBiackInsulation Height0.177° (4.50mm)Contact Length - Post-Operating Temperature40°C~105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllNumber of Rows0,50° (1.27mm)Number of Rows0,50° (1.27mm)Number of Rows0,050° (1.27mm)Number of Rows0,050° (1.27mm)Mounting TypeSurface MountYour of Rows0,050° (1.27mm)FerminationSolderFortninationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0,17° (4.50mm)Contact Length - Post-Operating Temperature40°C~105°C	Package	-
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.04Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Series	Minitek 127? 20021321
StyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Connector Type	Receptacle
Number of Positions 44 Number of Positions Loaded All Number of Positions Loaded 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Mounting Type Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.177" (4.50mm) Contact Length - Post - Operating Temperature 40°C ~ 105°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSurface MountFastening TypePosh-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Number of Positions	44
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Qperating Temperature40°C ~ 105°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Contact Finish - Mating	Gold
Insulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post-Operating Temperature-40°C ~ 105°C	Insulation Color	Black
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Insulation Height	0.177" (4.50mm)
	Contact Length - Post	-
Material Flammability Rating UL94 V-0	Operating Temperature	-40°C ~ 105°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place

Report errors?

20021321-00044C1LF Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

20021321-00044C1LF Payment Methods

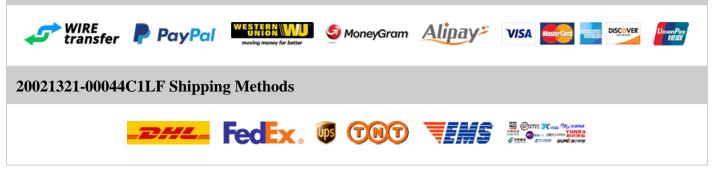

If you have any question about 20021321-00044C1LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com