

20021321-00050D4LF

20021321-00050D4LF Information

Heisener.com Ontariervor parts here		20021321-00050D4LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 50POS SMD GOLD	
	0	For the pricing/inventory/lead time, please contact	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



20021321-00050D4LF Specifications

Manufacturer Part Number20021321-00050D4LFManufacturerAmphenol FCICategoryConnectors, InterconnectsPackage-SeriesMinitel 127: 20021321Contact TypeReceptacles, Female SocketsContact TypeReceptacleContact TypeBoard to BoardNumber of PositionsSoNumber of Positions LoadedAllNumber of Rows2Number of Rows0.050" (1.27mm)Number of RowsSolderTerminationSolderStateing TypeSolderContact Finish - MatingGoldNumber of Rows2Rowspacing - MatingSolderStateing TypeSolderStateing TypeGoldStateing TypeGoldContact Finish - MatingGoldContact Finish - MatingMarka ContactInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Finish Finish Tikess - MatingJuly Conto'CMating Heignerature40°C ~ 105°CMating HeigneratureMating Conto'CMating HeigneratureMating Conto'CState Mating HeigneratureMating Conto'CState Mating HeigneratureMating Conto'CState Mating HeigneratureMating Conto'CState Mating Heignerature<		
CategoryConectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeReceptacleContact TypeBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFreminationSolderFastening TypeSurface MountContact Finish - MatingOidContact Finish - MatingIopin (0.25µm)Insulation ColorBlackInsulation FieldsJingregementInsulation FieldsJingregementInsulation FieldsJingregementInsulation FieldsMarce AlorsInsulation FieldsAlacInsulation FieldsAlac<	Manufacturer Part Number	20021321-00050D4LF
Package.SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSurface MountFerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Contact Finish Thickness - MatingJujin (0.25µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Manufacturer	Amphenol FCI
Package-SeriesMinitek 127? 2021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)Yenning TypeSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Category	Connectors, Interconnects
SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingBiackInsulation ColorBiackInsulation Height0.177° (4.50mm)Contact Length - Post-Contact Funsk - Mating0.177° (4.50mm)Contact Funsk - Mating0.177° (4.50mm)Contact Funsk - Mating0.177° (4.50mm)Contact Length - Post-Contact Funsk - Mating0.107° (1.05°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllNumber of Rows2Number of Rows0.050° (1.27mm)Number of Rows0.050° (1.27mm)Mounting TypeSurface MountYenrinationSolderFortinity FortinitySurface MountContact Finish - MatingGoldSontact Finish - MatingGoldInsulation ColorBlackInsulation Height0.17° (4.50mm)Contact Fungersture-Contact Fungersture9.40°C~105°C	Package	-
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Series	Minitek 127? 20021321
StyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Connector Type	Receptacle
Number of Positions 50 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Termination Solder Fastening Type Solder Fontact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.177" (4.50mm) Operating Temperature -40°C ~ 105°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSurface MountFastening TypePosh-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Number of Positions	50
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Qperating Temperature40°C ~ 105°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Contact Finish - Mating	Gold
Insulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post-Operating Temperature-40°C ~ 105°C	Insulation Color	Black
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Insulation Height	0.177" (4.50mm)
	Contact Length - Post	-
Material Flammability Rating UL94 V-0	Operating Temperature	-40°C ~ 105°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place

Report errors?

20021321-00050D4LF Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

20021321-00050D4LF Payment Methods

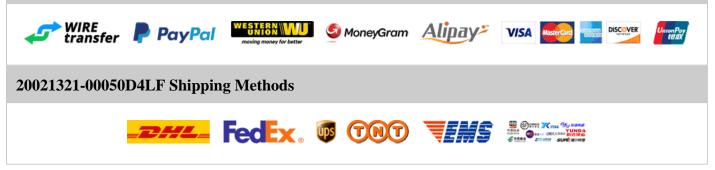

If you have any question about 20021321-00050D4LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com