

20021321-00060D8LF

20021321-00060D8LF Information

Heisener.com		20021321-00060D8LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 60POS SMD GOLD	
	Package	- For the pricing/inventory/lead time, please contact	回怒或派
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



20021321-00060D8LF Specifications

Manufacturer Part Number20021321-00060D8LFManufacturerAmphenol FCICategoryConnectors, InterconnectsPackage-SeriesMinitek 127? 20021321Contact TypeReceptacles, Female SocketsContact TypeReceptacleContact TypeBoard to BoardNumber of Positions60Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSolderTerminationSolderFastening TypeSolderContact Finish - Mating0.050° (1.27mm)Mounting TypeSolderState Mounting TypeSolderFastening TypeOider (1.27mm)Contact Finish - Mating0.050° (1.27mm)Mounting TypeSolderFastening TypeSolderContact Finish - Mating0.050° (1.27mm)Contact Finish - MatingSolderFastening TypeSolderFastening TypeSolder (1.27mm)Contact Finish - MatingSolder (1.27mm)Contact Finish Thickness - MatingSoldi (0.75m)Insulation ColorBackInsulation Forst.177° (4.50mm)Contact Finish Thickness - Mating.177° (4.50mm)Contact Finish Type.40°C ~ 105°CMaterial Flammability RatingU.194 V-0		
CategoryConectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSurface MountFreminationSolderFastening TypeSurface MountContact Finish - MatingGold, GXT?Contact Finish Thickness - MatingJouin (0.76µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Manufacturer Part Number	20021321-00060D8LF
Package.SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderYouring TypeSurface MountFerminationSolderFastening TypeOusf (0.50m)Contact Finish - MatingGold, GXT?Contact Finish Thickness - MatingJuin (0.76µm)Contact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Manufacturer	Amphenol FCI
Package-SeriesMinitek 127? 2021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)Yenning TypeSolderFastening TypeSolderContact Finish - MatingGold, GXT?Contact Finish Thickness - MatingJini (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Category	Connectors, Interconnects
SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - MatingGold, GXT?Contact Finish - MatingGold, GXT?Insulation ColorBlackInsulation Height0.177° (4.50mm)Contact Length - Post-Contact Funsh Thotknes40°C ~ 105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllNumber of Positions Loaded0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountForminationSolderContact Finish - MatingSolderContact Finish - MatingGold, GXT?Insulation ColorBlackInsulation Height0.17° (4.50mm)Contact Length - Post-Contact Funder-Mating Type0.17° (4.50mm)Contact Length - Post-Contact Funder-Mating Type-Mating Type-	Package	-
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Series	Minitek 127? 20021321
StyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Connector Type	Receptacle
Number of Positions 60 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Termination Solder Fastening Type Solder Contact Finish - Mating Gold, GXT? Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.177" (4.50mm) Operating Temperature 40°C ~ 105°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSurface MountFastening TypePosh-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - MatingBlackInsulation Color0.177" (4.50mm)Contact Length - Post-Yoperating Temperature40°C ~ 105°C	Number of Positions	60
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature40°C ~ 105°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Mounting Type	Surface Mount
Contact Finish - MatingGold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Contact Finish - Mating	Gold, GXT?
Insulation Height0.177" (4.50mm)Contact Length - Post-Operating Temperature-40°C ~ 105°C	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post-Operating Temperature-40°C ~ 105°C	Insulation Color	Black
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Insulation Height	0.177" (4.50mm)
	Contact Length - Post	-
Material Flammability Rating UL94 V-0	Operating Temperature	-40°C ~ 105°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place

Report errors?

20021321-00060D8LF Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

20021321-00060D8LF Payment Methods

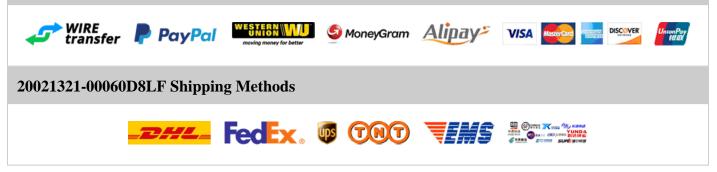

If you have any question about 20021321-00060D8LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com