

20021321-00214C4LF

20021321-00214C4LF Information

Heisener.com	Manufacturer Category Description	20021321-00214C4LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 14POS SMD GOLD	
	Package	- For the pricing/inventory/lead time, please contact us	E122-527%
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



20021321-00214C4LF Specifications

Manufacturer Part Number20021321-00214C4LFManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation Height0.177" (4.50mm)Contact Leneth - Post-		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleConnector TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Manufacturer Part Number	20021321-00214C4LF
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)	Manufacturer	Amphenol FCI
Package-SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)	Category	Connectors, Interconnects
SeriesMinitek 127? 20021321Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.0dInsulation ColorBlackInsulation Height0.177" (4.50mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.050Insulation ColorBlackInsulation Height0.177" (4.50mm)	Series	Minitek 127? 20021321
StyleBoard to BoardNumber of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Connector Type	Receptacle
Number of Positions14Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Contact Type	Female Socket
Number of Positions Loaded13Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Number of Positions	14
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Number of Positions Loaded	13
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.177" (4.50mm)	Contact Finish - Mating	Gold
Insulation Height 0.177" (4.50mm)	Contact Finish Thickness - Mating	10µin (0.25µm)
	Insulation Color	Black
Contact Length - Post	Insulation Height	0.177" (4.50mm)
	Contact Length - Post	-
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place

Report errors?

20021321-00214C4LF Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

20021321-00214C4LF Payment Methods

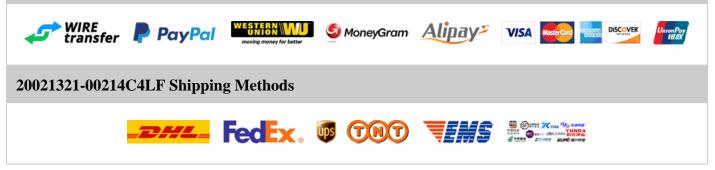

If you have any question about 20021321-00214C4LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com