

2030.0013

2030.0013 Information



Part Number	2030.0013	
Manufacturer	Schurter Inc.	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE BRD MNT 250MA 125VAC/VDC	
Package	Radial, Can, Vertical	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



2030.0013 Specifications

Manufacturer Part Number2030.0013ManufacturerSchurter Inc.CategoryCircuit ProtectionBackageRadial, Can, VerticalPackageMatu YangSeriesMSU 125Fuser TypeBoard MountCurrent Rating250mAVoltage Rating - DCJ25VNogenser TimeFastApplicationsFastApplications-Approvals-Operating Temperature-ApprovalsCURusApprovals-Applications The Package Moltage Rated Voltage-Approvals-Approvals-Approvals-Approvals-Applications The Package Moltage-Approvals-Approvals-Approvals-Applications Temperature-Applications Te		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating250mAVoltage Rating - AC125VVoltage Rating - DCI25VResponse TimeFastApplicationsTelecomFeatures-Class-Approvals25%C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseStail, Can, VerticalSize / Dimension0.252" Dia x 0.346" L(6.40mm x 8.80mm)	Manufacturer Part Number	2030.0013
PackageElectrical, Specialty FusesPackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating250mAVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.522" Dia x 0.346" L (6.40mm x 8.80mm)	Manufacturer	Schurter Inc.
PackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating250mAVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplications-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeFacual Anglia Can, VerticalPackage / CaseScalia Can, VerticalSize / Dimension0.252° Diax 0.346° L (6.40mm x 8.80mm)	Category	Circuit Protection
Series MSU 125 Fuse Type Board Mount Current Rating 250mA Voltage Rating - AC 125V Voltage Rating - DC 125V Response Time Fast Applications Telecom Features - Approvals cURus Operating Temperature 25°C ~ 85°C Breaking Capacity @ Rated Voltage 100A Mounting Type Guage Hole Package / Case Rating Capacity (6.40mm x 8.80mm)		Electrical, Specialty Fuses
Fuse TypeBoard MountCurrent Rating250mAVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature100ABreaking Capacity @ Rated Voltage100AMounting TypeRating CanacityPackage / CaseRating CanacitySize / Dimension0.522" Dia x 0.346" L (6.40mm x 8.80mm)	Package	Radial, Can, Vertical
Current Rating250mAVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-00ABreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / Case0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Series	MSU 125
Voltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Fuse Type	Board Mount
Voltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Current Rating	250mA
Response TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeFhrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Voltage Rating - AC	125V
ApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeFhrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Voltage Rating - DC	125V
Features-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Response Time	Fast
Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Applications	Telecom
ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Features	-
InInOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Class	-
Breaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Approvals	cURus
Mounting TypeThrough HolePackage / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Operating Temperature	-25°C ~ 85°C
Package / CaseRadial, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Breaking Capacity @ Rated Voltage	100A
Size / Dimension 0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Mounting Type	Through Hole
	Package / Case	Radial, Can, Vertical
	Size / Dimension	0.252" Dia x 0.346" L (6.40mm x 8.80mm)
Report errors		Report errors?

2030.0013 Guarantees

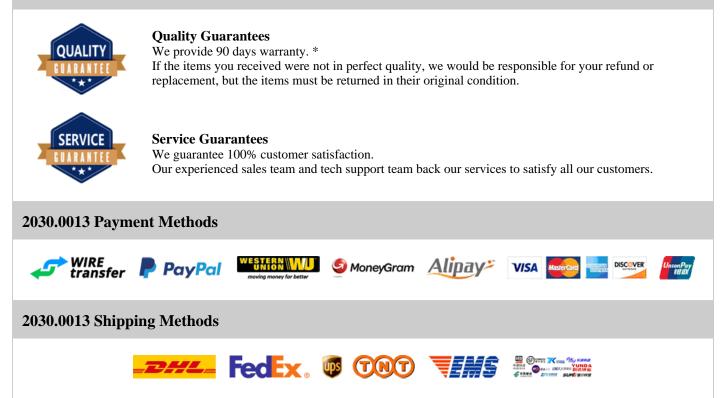

If you have any question about 2030.0013, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com