

2030.0556

2030.0556 Information



Part Number	2030.0556	
Manufacturer	Schurter Inc.	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE BRD MNT 3.15A 125VAC/VDC	
Package	Radial, Can, Vertical	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



2030.0556 Specifications

Manufacturer Part Number2030.0556ManufacturerSchurter Inc.CategoryCircuit ProtectionElectrical, Specialty FusesPackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating3.15AVoltage Rating - AC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadia, Can, VerticalSize / Dimension0.252" Dia x 0.346" L (6.40mm x 8.80mm)		
CategoryCircuit ProtectionFackageFactical, Specialty FusesPackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating3.15AVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~85°CFreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRatial, Can, Vertical	Manufacturer Part Number	2030.0556
First PackageElectrical, Specialty FusesPackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating3.15AVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRatial, Can, Vertical	Manufacturer	Schurter Inc.
PackageRadial, Can, VerticalSeriesMSU 125Fuse TypeBoard MountCurrent Rating3.15AVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeRatial, Can, Vertical	Category	Circuit Protection
SeriesMSU 125Fuse TypeBoard MountCurrent Rating3.15AVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeRating Can, Vertical		Electrical, Specialty Fuses
Fuse TypeBoard MountCurrent Rating3.15AVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeRatial, Can, Vertical	Package	Radial, Can, Vertical
Current Rating3.15AVoltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeFanoger MailPackage / CaseRadial, Can, Vertical	Series	MSU 125
Voltage Rating - AC125VVoltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Fuse Type	Board Mount
Voltage Rating - DC125VResponse TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Current Rating	3.15A
Response TimeFastApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature>25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRatial, Can, Vertical	Voltage Rating - AC	125V
ApplicationsTelecomFeatures-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeFhrough HolePackage / CaseRatial, Can, Vertical	Voltage Rating - DC	125V
Features-Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Response Time	Fast
Class-ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Applications	Telecom
ApprovalscURusOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Features	-
InInOperating Temperature-25°C ~ 85°CBreaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Class	-
Breaking Capacity @ Rated Voltage100AMounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Approvals	cURus
Mounting TypeThrough HolePackage / CaseRadial, Can, Vertical	Operating Temperature	-25°C ~ 85°C
Package / Case Radial, Can, Vertical	Breaking Capacity @ Rated Voltage	100A
	Mounting Type	Through Hole
Size / Dimension 0.252" Dia x 0.346" L (6.40mm x 8.80mm)	Package / Case	Radial, Can, Vertical
	Size / Dimension	0.252" Dia x 0.346" L (6.40mm x 8.80mm)
Report errors ⁶		Report errors?

2030.0556 Guarantees

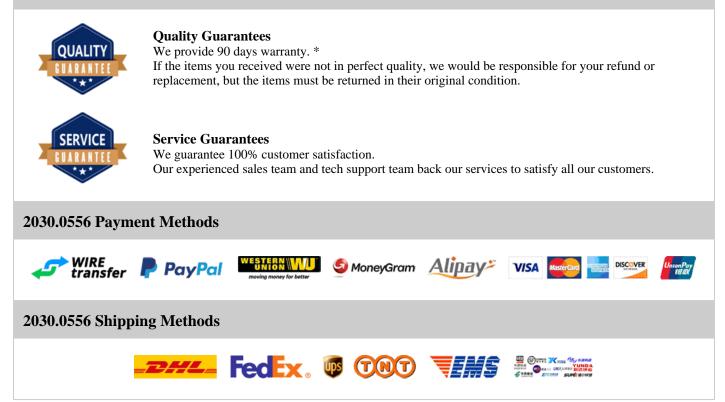

If you have any question about 2030.0556, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com