

208132-2

208132-2 Information

Heisener.com	Part Number Manufacturer Category Description Package	208132-2 TE Connectivity AMP Connectors Connectors, Interconnects Circular Connectors CONN RCPT CPC 37POS STD SER 1 -	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



208132-2 Specifications

Manufacturer Part Number 208132-2 Manufacturer TE Connectivity AMP Connectors Category Connectors, Interconnects Category Circular Connectors Package - Series CPC Series 1 Connector Type Receptacle, Male Pins Number of Positions 37 Shell Size - Insert 23-37 Mounting Type Panel Mount, Flange; Through Hole Termination Solder Orientation A Negres Protection - Shell Material, Finish Thermoplastic Contact Finish Thermoplastic Voltage - Rated 600VAC/DC Current Rating I3A		
CategoryConnectors, Interconnects Circular ConnectorsPackage-SeriesCPC Series 1Connector TypeReceptacle, Male PinsNumber of Positions37Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderOrientationAIngress Protection-Shell Material, FinishThermoplasticContact Finish-Features-Voltage - Rated600VAC/DCCurrent Rating13A	Manufacturer Part Number	208132-2
Circular ConnectorsPackage-SeriesCPC Series 1Connector TypeReceptacle, Male PinsNumber of Positions37Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAShell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Manufacturer	TE Connectivity AMP Connectors
Package-SeriesCPC Series 1Connector TypeReceptacle, Male PinsNumber of Positions37Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAShell Material, Finish-Shell Material, FinishThermoplasticFeatures-Voltage - Rated-Stort Rating13A	Category	Connectors, Interconnects
SeriesCPC Series 1Connector TypeReceptacle, Male PinsNumber of Positions37Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A		Circular Connectors
Connector TypeReceptacle, Male PinsNumber of Positions37Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeAOrientation-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Package	-
Number of Positions37Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Series	CPC Series 1
Shell Size - Insert23-37Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Connector Type	Receptacle, Male Pins
Shell Size, MIL-Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCFurent Rating13A	Number of Positions	37
Mounting TypePanel Mount, Flange; Through HoleTerminationSolderFastening TypeThreadedOrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Shell Size - Insert	23-37
TerminationSolderFastening TypeThreadedOrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Shell Size, MIL	-
Fastening TypeThreadedFastening TypeAOrientation-Ingress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Mounting Type	Panel Mount, Flange; Through Hole
OrientationAIngress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Termination	Solder
Ingress Protection-Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Fastening Type	Threaded
Shell Material, FinishThermoplasticContact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Orientation	А
Contact FinishTinFeatures-Voltage - Rated600VAC/DCCurrent Rating13A	Ingress Protection	-
Features-Voltage - Rated600VAC/DCCurrent Rating13A	Shell Material, Finish	Thermoplastic
Voltage - Rated600VAC/DCCurrent Rating13A	Contact Finish	Tin
Current Rating 13A	Features	-
-	Voltage - Rated	600VAC/DC
Report errors?	Current Rating	13A
		Report errors?

208132-2 Guarantees

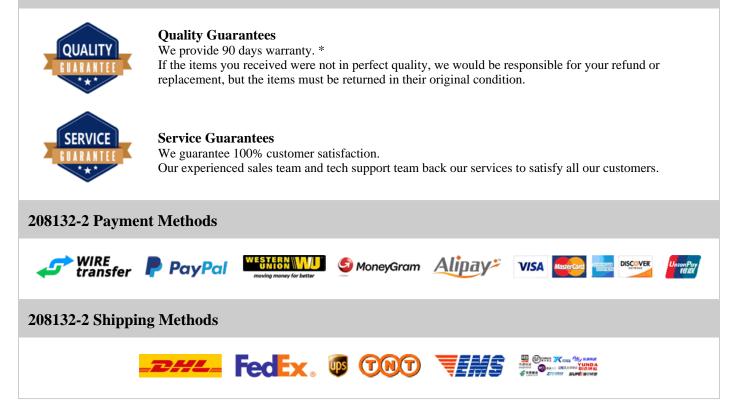

If you have any question about 208132-2, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com