


225P47492YD3

225P47492YD3 Information

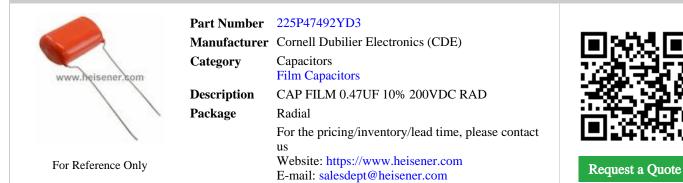

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



225P47492YD3 Specifications

Manufacturer Part Number225P47492YD3ManufacturerCornell Dubilier Electronics (CDE)CategoryCapacitorsPackageRadialSeriesOrange Drop? 225PCapacitance0.47µFTolerance±10%Voltage Rating - AC140VVoltage Rating - DC200VDielectric MaterialPolyesterForuging Temperature-Operating Temperature55°C ~ 85°CMounting TypeThrough HoleVoltage Acd (Max)1.250° L x 0.500° W (31.75mm x 12.70mm)Height - Seated (Max)0.720° (18.30mm)TerminationPC PinsLead Spacing0.720° (18.30mm)ApplicationsDC Link, DC Filtering		
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesOrange Drop? 225PCapacitance0.47µFTolerance±10%Voltage Rating - AC140VVoltage Rating - DC90v9Dielectric Material0.47µFSR (Equivalent Series Resistance)-Operating Temperature-Aduating Type15°°C ~ 85°CMounting Type1.250° L x 0.500° W (31.75mm x 12.70mm)Field Maxa0.830° (21.10mm)Height - Seated (Max)0.830° (21.10mm)Lead Spacing0.720° (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Manufacturer Part Number	225P47492YD3
Fin CapacitorsPackageRadialSeriesOrange Drop? 225PCapacitance0.47µFTolerance±10%Voltage Rating - AC140VVoltage Rating - DC200VDielectric MaterialPolyesterESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250° L x 0.500° W (31.75mm x 12.70mm)Height - Seated (Max)0.830° (21.10mm)TerminationPC PinsLead Spacing0.720° (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Manufacturer	Cornell Dubilier Electronics (CDE)
PackageRadialSeriesOrange Drop? 25PCapacitance0.47µFTolerance±10%Voltage Rating - AC140VVoltage Rating - DC200VDielectric MaterialPolyesterDielectric Material-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250° L x 0.500° W (31.75mm x 12.70mm)Height - Seated (Max)0.830° (21.10mm)Lead Spacing0.720° (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Category	Capacitors
Series Orange Drop? 225P Capacitance 0.47µF Tolerance ±10% Voltage Rating - AC 140V Voltage Rating - DC 200V Dielectric Material Polyester Dielectric Material - Operating Temperature -55°C ~ 85°C Mounting Type Through Hole Package / Case Radial Size / Dimension 1.250° L x 0.500° W (31.75mm x 12.70mm) Height - Seated (Max) 0.830° (21.10mm) Lead Spacing 0.720° (18.30mm) Applications DC Link, DC Filtering Features -		Film Capacitors
Capacitance0.47µFTolerance±10%Voltage Rating - AC140VVoltage Rating - DC200VDielectric MaterialPolyesterESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsSC Link, DC FilteringFeatures-	Package	Radial
Tolerance±10%Voltage Rating - AC140VVoltage Rating - DC200VDielectric MaterialPolyesterESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Series	Orange Drop? 225P
Voltage Rating - AC140VVoltage Rating - DC200VDielectric MaterialPolyesterESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Capacitance	0.47µF
Voltage Rating - DC200VDielectric MaterialPolyesterESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250° L x 0.500° W (31.75mm x 12.70mm)Height - Seated (Max)0.830° (21.10mm)TerminationPC PinsLead Spacing0.720° (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Tolerance	±10%
Dielectric MaterialPolyesterDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Voltage Rating - AC	140V
ESR (Equivalent Series Resistance).Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Voltage Rating - DC	200V
Operating Temperature-55°C ~ 85°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Dielectric Material	Polyester
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension1.250" L x 0.500" W (31.75mm x 12.70mm)Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Operating Temperature	-55°C ~ 85°C
Size / Dimension 1.250" L x 0.500" W (31.75mm x 12.70mm) Height - Seated (Max) 0.830" (21.10mm) Termination PC Pins Lead Spacing 0.720" (18.30mm) Applications DC Link, DC Filtering Features -	Mounting Type	Through Hole
Height - Seated (Max)0.830" (21.10mm)TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Size / Dimension	1.250" L x 0.500" W (31.75mm x 12.70mm)
Lead Spacing0.720" (18.30mm)ApplicationsDC Link, DC FilteringFeatures-	Height - Seated (Max)	0.830" (21.10mm)
ApplicationsDC Link, DC FilteringFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.720" (18.30mm)
	Applications	DC Link, DC Filtering
Depart array	Features	-
Keport erors		Report errors?

225P47492YD3 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

225P47492YD3 Payment Methods



If you have any question about 225P47492YD3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com