

241-4-56L

241-4-56L Information

Contail levice states test	 241-4-56L Signal Transformer Transformers Power Transformers XFRMR LAMINATED 6VA CHAS MOUNT - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



241-4-56L Specifications

ManufacturerSignal TransformerCategoryTransformersPackage-Package-SeriesTwo-4-One?TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChasis MountTermination StyleSingleSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - IsolationSicolotrum		
CategoryTansformersPackage-SeriesTwo-4-One?TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountSize / Dimension60.30mm L x 33.30mm WSize / Dimension36.20mmVoltage - Isolation500VrmsWeight0.44 lb (199.58g)	Manufacturer Part Number	241-4-56L
InterfactPower TransformersPackage-SeriesTwo-4-One?TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.441b (199.58g)	Manufacturer	Signal Transformer
Package-SeriesTwo-4-One?TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChasis MountTermination StyleSingleSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmWitege Lsolation2500VrmsWeight0.41b (199.58g)	Category	Transformers
SeriesTwo-4-One?TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)YesPower - Max6 VAMounting TypeChasis MountTermination Style60.30mm L x 33.30mm WSize / Dimension36.20mmVoltage - Isolation500VrmsWeight0.44 lb (199.58g)		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)10mAPrimary Winding(s)SingleSecondary Winding(s)SinglePower - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension6.30mm L x 33.30mm WHeight - Seated (Max)36.20mmWotage - Isolation2500VrmsWeight0.44 lb (199.58g)	Package	-
A115VVoltage - Primary115VVoltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountTermination Style60.30mm L x 33.30mm WSize / Dimension36.20mmHeight - Seated (Max)2500VrmsWoitght0.441b (199.58g)	Series	Two-4-One?
Voltage - Secondary (Full Load)56VCurrent - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Туре	Laminated Core
Current - Output (Max)110mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Voltage - Secondary (Full Load)	56V
Secondary Winding(s)SingleCenter TapYesPower - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Current - Output (Max)	110mA
Center TapYesPower - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Primary Winding(s)	Single
Power - Max6 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Secondary Winding(s)	Single
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Center Tap	Yes
Termination StyleWire LeadsSize / Dimension60.30mm L x 33.30mm WHeight - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Power - Max	6 VA
Size / Dimension 60.30mm L x 33.30mm W Height - Seated (Max) 36.20mm Voltage - Isolation 2500Vrms Weight 0.44 lb (199.58g)	Mounting Type	Chassis Mount
Height - Seated (Max)36.20mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Termination Style	Wire Leads
Voltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Size / Dimension	60.30mm L x 33.30mm W
Weight 0.44 lb (199.58g)	Height - Seated (Max)	36.20mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.44 lb (199.58g)
		Report errors?

241-4-56L Guarantees

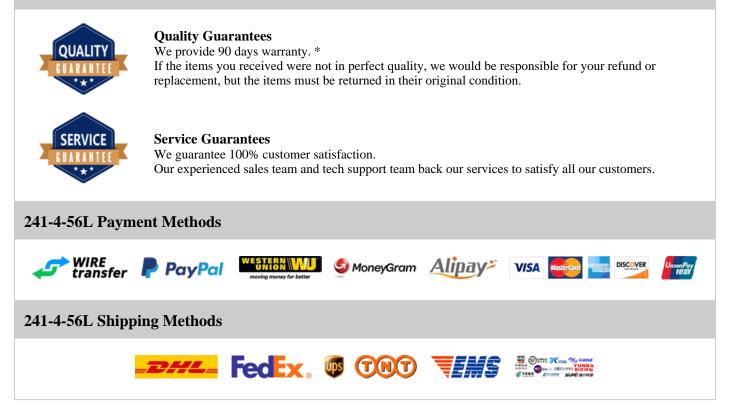

If you have any question about 241-4-56L, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com