

## **260K Information**



## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **260K Specifications**

Manufacturer Part Number 260K   Manufacturing Hammond Manufacturing   Category Transformers   Power Transformers Power Transformers   Package -   Series 260   Type Laminated Core   Voltage - Primary 100V, 120V, 220V, 240V   Voltage - Secondary (Full Load) 650V, 6.3V, 5V   Current - Output (Max) 230mA, 5A, 3A   Primary Winding(s) Dual, Multiple Taps   Secondary Winding(s) Triple   Power - Max 197 VA   Mounting Type Chassis Mount   Size / Dimension 114.30mm L x 82.55mm W   Voltage - Isolation >.252mm		
CategoryTransformersPockage-Series260TypeLaminated CoreVoltage - Primary100V, 120V, 220V, 240VVoltage - Secondary (Full Load)650V, 6.3V, 5VCurrent - Output (Max)230mA, 5A, 3APrimary Winding(s)Dual, Multiple TapsSecondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountSize / Dimension114.30mm Lx 82.55mm WSize / Dimension9.52mmVoltage - Isolation-Weight8.4 Ibs (3.8kg)	Manufacturer Part Number	260K
Power Transformers   Package -   Series 260   Type Laminated Core   Voltage - Primary 100V, 120V, 220V, 240V   Voltage - Secondary (Full Load) 650V, 6.3V, 5V   Current - Output (Max) 230mA, 5A, 3A   Primary Winding(s) Dual, Multiple Taps   Secondary Winding(s) Yripe   Center Tap Yes   Power - Max 197 VA   Mounting Type Chasis Mount   Size / Dimension 141.30mm Lx 82.55mm Wallence   Size / Dimension 52.5mm   Voltage - Isolation 52.5mm	Manufacturer	Hammond Manufacturing
Package-Series260TypeLaminated CoreVoltage - Primary100V, 120V, 220V, 240VVoltage - Secondary (Full Load)560V, 6.3V, 5VCurrent - Output (Max)230mA, 5A, 3APrimary Winding(s)Dual, Multiple TapsSecondary Winding(s)FripleCenter TapYesPower - Max197 VAMounting TypeChasis MountStez / Dimension114.30mm Lx 82.55mm WStez / Dimension5.25mmVoltage - Isolation-Weight8.41bs (3.8kg)	Category	Transformers
Series260TypeLaminated CoreVoltage - Primary100V, 120V, 220V, 240VVoltage - Secondary (Full Load)650V, 6.3V, 5VCurrent - Output (Max)230mA, 5A, 3APrimary Winding(s)Dual, Multiple TapsSecondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension14.30mm L x 82.55mm WHeight - Seated (Max)-Wottge - Isolation-Weight8.4 lbs (3.8kg)		Power Transformers
TypeLaminated CoreVoltage - Primary100V, 120V, 220V, 240VVoltage - Secondary (Full Load)650V, 6.3V, 5VCurrent - Output (Max)230mA, 5A, 3APrimary Winding(s)Dual, Multiple TapsSecondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleNire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)-Voltage - Isolation8.4 lbs (3.8kg)	Package	-
A 100V, 120V, 220V, 240V   Voltage - Primary 100V, 120V, 220V, 240V   Voltage - Secondary (Full Load) 650V, 6.3V, 5V   Current - Output (Max) 230mA, 5A, 3A   Primary Winding(s) Dual, Multiple Taps   Secondary Winding(s) Triple   Center Tap Yes   Power - Max 197 VA   Mounting Type Chassis Mount   Termination Style Wire Leads   Size / Dimension 114.30mm L x 82.55mm W   Height - Seated (Max) 95.25mm   Voltage - Isolation 8.4 lbs (3.8kg)	Series	260
Voltage - Secondary (Full Load)650V, 6.3V, 5VCurrent - Output (Max)230mA, 5A, 3APrimary Winding(s)Dual, Multiple TapsSecondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Туре	Laminated Core
Current - Output (Max)230mA, 5A, 3APrimary Winding(s)Dual, Multiple TapsSecondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight84.1bs (3.8kg)	Voltage - Primary	100V, 120V, 220V, 240V
Primary Winding(s)Dual, Multiple TapsSecondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Voltage - Secondary (Full Load)	650V, 6.3V, 5V
Secondary Winding(s)TripleCenter TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Current - Output (Max)	230mA, 5A, 3A
Center TapYesPower - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Primary Winding(s)	Dual, Multiple Taps
Power - Max197 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Secondary Winding(s)	Triple
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Center Tap	Yes
Termination StyleWire LeadsSize / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Power - Max	197 VA
Size / Dimension114.30mm L x 82.55mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Mounting Type	Chassis Mount
Height - Seated (Max)95.25mmVoltage - Isolation-Weight8.4 lbs (3.8kg)	Termination Style	Wire Leads
Voltage - Isolation-Weight8.4 lbs (3.8kg)	Size / Dimension	114.30mm L x 82.55mm W
Weight 8.4 lbs (3.8kg)	Height - Seated (Max)	95.25mm
	Voltage - Isolation	-
Report errors?	Weight	8.4 lbs (3.8kg)
		Report errors?

## **260K Guarantees**

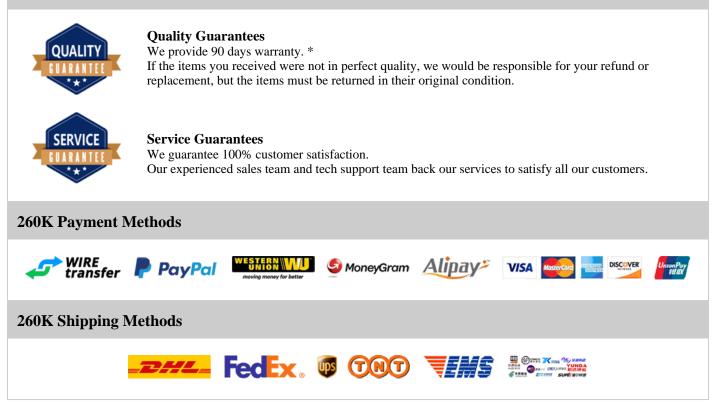

If you have any question about 260K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com