

2866336

2866336 Information



2866336
Phoenix Contact
Power Supplies - External/Internal (Off-Board) AC DC Converters
AC/DC CONVERTER 24V 100W
-
For the pricing/inventory/lead time, please contact us
Website: https://www.heisener.com E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



2866336 Specifications

Manufacturer Part Number2866336ManufacturerPhoenix ContactCategoryPower Supplies - External/Internal (Off-Board)A C D C ConvertersPackage-SeriesMINITypeEnclosedNumber of Outputs1Voltage - Input100 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Voltage - Output 5100WVoltage - Output 4-Voltage - Output 4-Voltage - Output 5100WErrer 6100WApplicationsITE (Commercial)Voltage - Isolation4KV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating) PFC, Universal InputMounting TypeDIN RailSize / Dimension4.21" L x 2.66" W x 3.90" H (107.0mm x 67.5mm x 99.0mm)		
CategoryPower Supplies - External/Internal (Off-Board)Ac DC ConvertersPackage-SeriesMINITypeEnclosedNumber of Outputs1Voltage - Input100 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Voltage - Output 43.8APower (Watts)ITE (Commercial)Applications4kV (4000V)Efficiency8%Operating Temperature-5°C ~ 70°C (With Derating).FeaturesDIN Rail	Manufacturer Part Number	2866336
AC DC ConvertersPackage-SeriesMINITypeEnclosedNumber of Outputs1Voltage - Input100 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency8%Operating Temperature-25°C ~ 70°C (With Derating), PFC, Universal InputMounting TypeDIN Rail	Manufacturer	Phoenix Contact
Package.SeriesMINITypeEnclosedNumber of Outputs1Voltage - Input100 ~ 240 VACVoltage - Output 100 ~ 240 VACVoltage - Output 2.Voltage - Output 3.Voltage - Output 4.Voltage - Solotation.Voltage - Isolation.Voltage - Isolation.Voltage - Solotation.Voltage - Solotation.	Category	Power Supplies - External/Internal (Off-Board)
SeriesMINITypeEnclosedNumber of Outputs1Voltage - Input100 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 43.8APower (Watts)100WApplicationsTE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating). FPC, Universal InputMounting TypeDIN Rail		AC DC Converters
TypeEnclosedNumber of Outputs1Voltage - Input100 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Voltage - Output 43.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation8%Operating TemperatureAjustabe Output, Load Sharing, PFC, Universal InputHounting TypeDIN Rail	Package	-
Number of Outputs1Number of Outputs100 ~ 240 VACVoltage - Input00 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsHTE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Series	MINI
Voltage - Input100 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Туре	Enclosed
Voltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Number of Outputs	1
Voltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Voltage - Input	100 ~ 240 VAC
Voltage - Output 3-Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Voltage - Output 1	24V
Voltage - Output 4-Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Voltage - Output 2	-
Current - Output (Max)3.8APower (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Voltage - Output 3	-
Power (Watts)100WApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Voltage - Output 4	-
ApplicationsITE (Commercial)Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Current - Output (Max)	3.8A
Voltage - Isolation4kV (4000V)Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Power (Watts)	100W
Efficiency88%Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Applications	ITE (Commercial)
Operating Temperature-25°C ~ 70°C (With Derating)FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Voltage - Isolation	4kV (4000V)
FeaturesAdjustable Output, Load Sharing, PFC, Universal InputMounting TypeDIN Rail	Efficiency	88%
Mounting Type DIN Rail	Operating Temperature	-25° C ~ 70° C (With Derating)
	Features	Adjustable Output, Load Sharing, PFC, Universal Input
Size / Dimension 4.21" L x 2.66" W x 3.90" H (107.0mm x 67.5mm x 99.0mm)	Mounting Type	DIN Rail
	Size / Dimension	4.21" L x 2.66" W x 3.90" H (107.0mm x 67.5mm x 99.0mm)
Report er		Report errors?

2866336 Guarantees

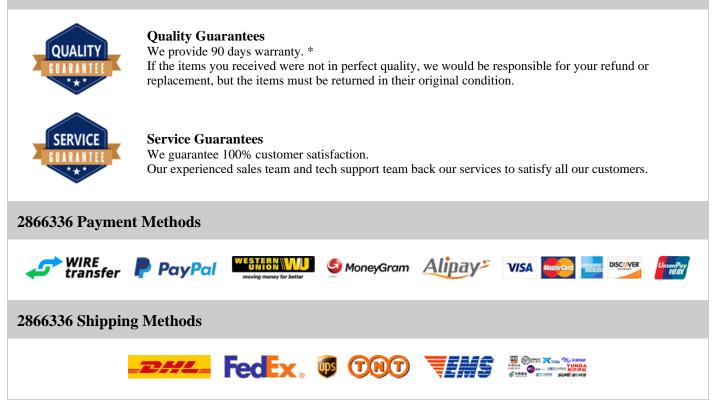

If you have any question about 2866336, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com