

292227-3

292227-3 Information



| ty AMP Connectors |
|---|
| terconnects onnectors - Headers, Male Pins |
| ER 3POS R/A SMD TIN |
| |
| /inventory/lead time, please contact ://www.heisener.com ept@heisener.com |
| |



Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




292227-3 Specifications

| Manufacturer Part Number | 292227-3 |
|----------------------------|---|
| Manufacturer | TE Connectivity AMP Connectors |
| Category | Connectors, Interconnects |
| | Rectangular Connectors - Headers, Male Pins |
| Package | - |
| Series | Mini CT |
| Connector Type | Header |
| Contact Type | Male Pin |
| Pitch - Mating | 0.059" (1.50mm) |
| Style | Board to Cable/Wire |
| Shrouding | Shrouded - 4 Wall |
| Number of Positions | 3 |
| Number of Positions Loaded | All |
| Number of Rows | 1 |
| Row Spacing - Mating | - |
| Mounting Type | Surface Mount, Right Angle |
| Termination | Solder |
| Fastening Type | Detent Lock |
| Contact Length - Mating | 0.094" (2.40mm) |
| Contact Length - Post | - |
| Overall Contact Length | - |
| Insulation Height | 0.193" (4.90mm) |
| Contact Shape | Square |
| Contact Finish - Mating | Tin |
| | |

| Contact Finish Thickness - Mating | - |
|-----------------------------------|--|
| Contact Finish - Post | Tin |
| Contact Material | Brass |
| Insulation Material | Polyamide (PA6T), Nylon 6T, Glass Filled |
| Features | Board Guide, Solder Retention |
| Operating Temperature | -30°C ~ 105°C |
| Ingress Protection | - |
| Material Flammability Rating | UL94 V-0 |
| Insulation Color | Beige |
| | Report errors? |

292227-3 Guarantees

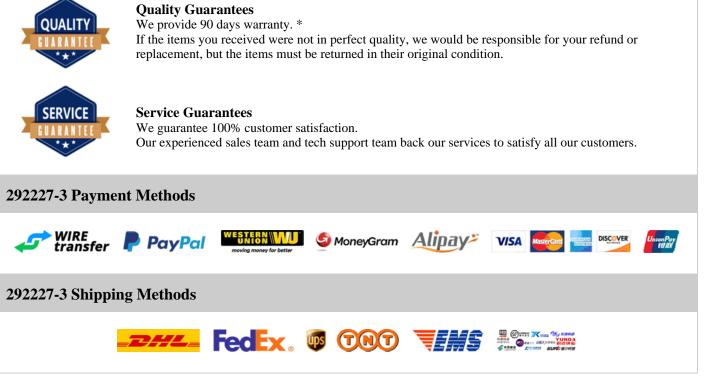

If you have any question about 292227-3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com