

3031610

3031610 Information

Heisener. G	Part Number Manufacturer Category Description Package	3031610 Phoenix Contact Connectors, Interconnects Terminal Blocks - Din Rail, Channel CONN TERM BLK FEED THRU 12-28AWG - For the pricing/inventory/lead time, please contact	
For Reference On	ly	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



3031610 Specifications

Manufacturer Part Number 3031610 Manufacturer Phoenix Contact Category Connectors, Interconnects Terminal Blocks - Din Rail, Channel Package - Series CLIPLINE STTB Type Feed Through Disconnect Type - Number of Positions 4 Number of Levels 2; Connected Terminal - Width 5.2mm Current - IEC 22A Voltage - IEC 500V Current - UL 0A Voltage - UL 600V Wire Gauge or Range - AWG 12-28 AWG Wire Gauge or Range - AWG LED Color Gray		
CategoryConnectors, InterconnectsPackage-Package-SeriesCLIPLINE STTBTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC20XVoltage - IEC50VVoltage - UL60VWire Gauge or Range - AWG0.84Mm²Vire Gauge or Range - AWG0.84Mm²FeaturesEBDColorGray	Manufacturer Part Number	3031610
Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE STTBTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - AMGEDColorGay	Manufacturer	Phoenix Contact
Package.SeriesCLIPLINE STTBStripeFeed ThroughTypeoDisconnect Type.Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination Style9uh In, SpringCurrent - IEC22AVoltage - IEC600VVoltage - UL600VVoltage of Range - AWG1.228 AWGWire Gauge or Range - AMG0.84mm²FeaturesLEDColorGay	Category	Connectors, Interconnects
SeriesCLIPLINE STTBTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - UL00AWine Gauge or Range - AWG1.228 AWGWire Gauge or Range - amma0.08-4mm²FeaturesLEDColorGray		Terminal Blocks - Din Rail, Channel
TypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - ULL00AVoltage - WL600VWire Gauge or Range - AWG1228 AWGWire Gauge or Range - AMGLEDColorGray	Package	-
Disconnect Type-Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - UL00AVoltage - UL600VWire Gauge or Range - AWG1.2-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Series	CLIPLINE STTB
Number of Positions4Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - UL20AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - and Pa0.08-4mm²FeaturesLEDColorGray	Туре	Feed Through
Number of Levels2; ConnectedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - UL00AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Disconnect Type	-
Terminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - UL20AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Number of Positions	4
Termination StylePush In, SpringCurrent - IEC22AVoltage - IEC500VCurrent - UL20AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Number of Levels	2; Connected
Current - IEC22AVoltage - IEC500VCurrent - UL20AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Terminal - Width	5.2mm
Voltage - IEC500VCurrent - UL20AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Termination Style	Push In, Spring
Current - UL20AVoltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Current - IEC	22A
Voltage - UL600VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Voltage - IEC	500V
Wire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Current - UL	20A
Wire Gauge or Range - mm²0.08-4mm²FeaturesLEDColorGray	Voltage - UL	600V
Features LED Color Gray	Wire Gauge or Range - AWG	12-28 AWG
Color Gray	Wire Gauge or Range - mm ²	0.08-4mm ²
	Features	LED
Report errors?	Color	Gray
1		Report errors?

3031610 Guarantees

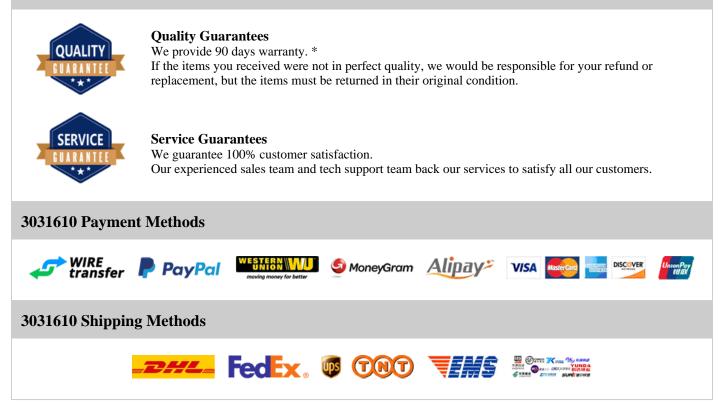

If you have any question about 3031610, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com