

3038642

3038642 Information



Part Number	3038642	
Manufacturer	Phoenix Contact	
Category	Connectors, Interconnects Terminal Blocks - Din Rail, Channel	
Description	CONN TERM BLK DISCONN 12-28AWG	
Package	-	
	For the pricing/inventory/lead time, please contact	
	us	
Website: https://www.heisener.com		
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



3038642 Specifications

Manufacturer Part Number 3038642 Manufacturer Phoenix Contact Category Connectors, Interconnects Package - Package - Series CLIPLINE STI Type Disconnect, Feed Through, Isolated Number of Positions S Number of Levels S, I Grounded Termination Style Push In, Spring Current - IEC - Voltage of Range - AWG -		
CategoryConnectors, Interconnects reminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE STITypeDisconnect, Feed Through, IsolatedDisconnect TypeSwitch, LeverNumber of Positions5Number of Levels3; 1 GroundedTerminal - Width5.2mmCurrent - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG0.84ma²Features-ColorGray	Manufacturer Part Number	3038642
Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE STITypeDisconnect, Feed Through, IsolatedDisconnect TypeSwitch, LeverNumber of Positions5Number of Levels3; 1 GroundedTerminal - Width5.2mmCurrent - IEC24AVoltage - IEC-Voltage - UL300VWire Gauge or Range - AWG1.228 AWGWire Gauge or Range - AMG0.84mm²Features-ColorGray	Manufacturer	Phoenix Contact
Package-SeriesCLIPLINE STITypeDisconnect, Feed Through, IsolatedDisconnect TypeSwitch, LeverNumber of Positions5Number of Levels3, 1 GroundedTerminal - Width5.2mmCurrent - IEC24AVoltage - IEC-Voltage - UL300VWire Gauge or Range - AWG1.228 AWGWire Gauge or Range - mm²-ColorGray	Category	Connectors, Interconnects
SeriesCLIPLINE STITypeDisconnect, Feed Through, IsolatedDisconnect TypeSwitch, LeverNumber of Positions5Number of Levels3; 1 GroundedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL300VWire Gauge or Range - AWG0.08-4mm²Wire Gauge or Range - mark6.08-4mm²ColorGray		Terminal Blocks - Din Rail, Channel
TypeDisconnect, Feed Through, IsolatedDisconnect TypeSwitch, LeverNumber of Positions5Number of Levels3; 1 GroundedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL300VWire Gauge or Range - AWG1.2-28 AWGWire Gauge or Range - Summer0.08-4mm²Features-ColorGray	Package	-
Disconnect TypeSwitch, LeverNumber of Positions5Number of Levels3; 1 GroundedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG1.228 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Series	CLIPLINE STI
Number of Positions5Number of Levels3; 1 GroundedTerminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Туре	Disconnect, Feed Through, Isolated
Number of Levels3; 1 GroundedNumber of Levels5.2mmTermination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Disconnect Type	Switch, Lever
Terminal - Width5.2mmTermination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Number of Positions	5
Termination StylePush In, SpringCurrent - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Number of Levels	3; 1 Grounded
Current - IEC24AVoltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Terminal - Width	5.2mm
Voltage - IEC-Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Termination Style	Push In, Spring
Current - UL-Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Current - IEC	24A
Voltage - UL300VWire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Voltage - IEC	-
Wire Gauge or Range - AWG12-28 AWGWire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Current - UL	-
Wire Gauge or Range - mm²0.08-4mm²Features-ColorGray	Voltage - UL	300V
Features - Color Gray	Wire Gauge or Range - AWG	12-28 AWG
Color Gray	Wire Gauge or Range - mm ²	0.08-4mm ²
	Features	-
Report errors?	Color	Gray
		Report errors?

3038642 Guarantees

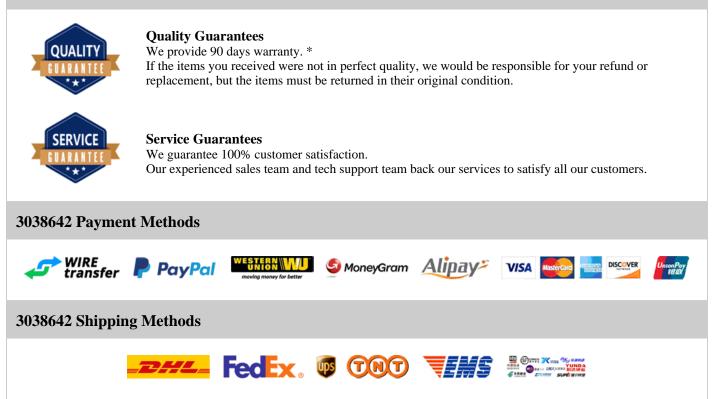

If you have any question about 3038642, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com