

3211802

3211802 Information

3	Heisener.com	1 41 0 1 (4110 01	3211802 Phoenix Contact Connectors, Interconnects Terminal Blocks - Din Rail, Channel CONN TERM BLK FEED THRU 10-24AWG - For the pricing/inventory/lead time, please contact	
	For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



3211802 Specifications

Manufacturer Part Number 3211802 Manufacturer Phoenix Contact Category Connectors, Interconnects Terminal Blocks - Din Rail, Channel Terminal Blocks - Din Rail, Channel Package - Steries CLIPLINE PT Type Feed Through Disconnect Type - Number of Positions 4 Number of Levels 1 Terminal Niddh 6.2mm Current - IEC 32A Voltage - IEC Solv Voltage - IEC 30A Voltage - UL 60V Vire Gauge or Range - AWG 10-24 AWG Vire Gauge or Range - AWG -24 AWG		
CategoryConnectors, Interconnects Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination Style9ush In, SpringCurrent - IEC30AVoltage - IEC600VVoltage - UL6.0QWire Gauge or Range - AWG0.24AWGWire Gauge or Range - AWG0.24Am2Features-ColorBlue	Manufacturer Part Number	3211802
Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - AMG0.24mm²Features-ColorBlue	Manufacturer	Phoenix Contact
Package-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Positions1Terminal - Width6.2mmTermination Style9ush In, SpringCurrent - IEC32AVoltage - IEC600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - AMG0.2-4mm²Features-ColorBlue	Category	Connectors, Interconnects
SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue		Terminal Blocks - Din Rail, Channel
TypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage or Range - AWG10-24 AWGWire Gauge or Range - AMG0.2-4mm²Features-ColorBlue	Package	-
Disconnect Type-Disconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG1-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Series	CLIPLINE PT
Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Туре	Feed Through
Number of Levels1Number of Levels6.2mmTermination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG0.24AWGWire Gauge or Range - mm²0.24mm²Features-ColorBlue	Disconnect Type	-
Terninal - Width6.2mmTernination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge - mm²0.2-4mm²Features-ColorBlue	Number of Positions	4
Termination StylePush In, SpringCurrent - IEC32AVoltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - and Partice0.2-4 and ParticeFeatures-ColorBlue	Number of Levels	1
Current - IEC32AVoltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Terminal - Width	6.2mm
Voltage - IEC800VCurrent - UL30AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Termination Style	Push In, Spring
Current - UL30AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Current - IEC	32A
Voltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Voltage - IEC	800V
Wire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Current - UL	30A
Wire Gauge or Range - mm²0.2-4mm²Features-ColorBlue	Voltage - UL	600V
Features - Color Blue	Wire Gauge or Range - AWG	10-24 AWG
Color Blue	Wire Gauge or Range - mm ²	0.2-4mm ²
	Features	-
Report errors?	Color	Blue
		Report errors?

3211802 Guarantees

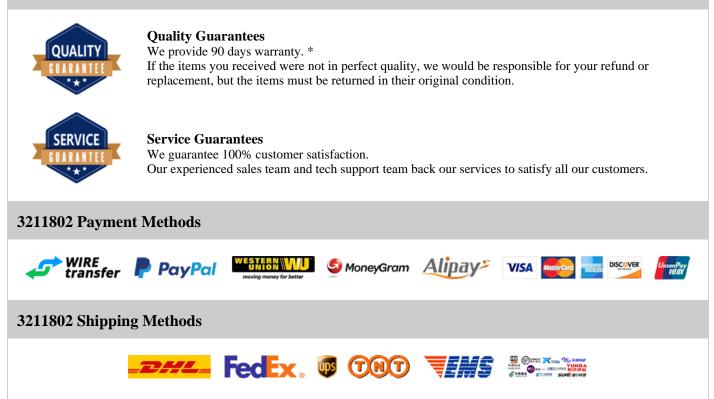

If you have any question about 3211802, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com