

3211919

3211919 Information

Container com	Part Number Manufacturer Category Description Package	3211919 Phoenix Contact Connectors, Interconnects Terminal Blocks - Din Rail, Channel CONN TERM BLK FEED THRU 10-24AWG - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



3211919 Specifications

Manufacturer Part Number2211919ManufacturerPhoenix ContactCategoryConnectors, InterconnectsTerminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmCurrent - IEC1.5AVoltage - IEC800VCurrent - UL0.5AVoltage or Range - AWG0.24 AWGWire Gauge or Range - AWGDiadeFeaturesDiadeFeaturesDiadeColorDiadeFeaturesDiadeColorDiadeColorDiadeColor </th <th></th> <th></th>		
CategoryConnectors, Interconnects Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal Nidth6.2mmTermination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage r Mange - AWG0.24 AWGWire Gauge or Range - AMG0.24 AMGFeaturesDiodeColorGray	Manufacturer Part Number	3211919
Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL6.00VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²DiodeFeaturesDiodeColorGray	Manufacturer	Phoenix Contact
Package-SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination Style9kol Na, SpringCurrent - IECC1.5AVoltage - IEC1.5AVoltage - UL6.00VWire Gauge or Range - AWG0.24 AWGWire Gauge or Range - AMG0.24 AMGFeaturesDiodeFeaturesDiodeColorGray	Category	Connectors, Interconnects
SeriesCLIPLINE PTTypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray		Terminal Blocks - Din Rail, Channel
TypeFeed ThroughDisconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG0.2-4mm²FeaturesDiodeColorGray	Package	-
Disconnect Type-Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Series	CLIPLINE PT
Number of Positions4Number of Levels1Terminal - Width6.2mmTermination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG0.2-4MMGWire Gauge or Range - and ParticeDiodeFeaturesDiodeColorGray	Туре	Feed Through
Number of Levels1Yumber of Levels6.2mmTermination StylePush In, SpringCurrent - IEC1.5AYoltage - IEC800VCurrent - UL1.5AYoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0:2-4mm²FeaturesDiodeYoltage - ColorGary	Disconnect Type	-
Terninal - Width6.2mmTernination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Number of Positions	4
Termination StylePush In, SpringCurrent - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - amm²0.2-4mm²FeaturesDiodeColorGary	Number of Levels	1
Current - IEC1.5AVoltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Terminal - Width	6.2mm
Voltage - IEC800VCurrent - UL1.5AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Termination Style	Push In, Spring
Current - UL1.5AVoltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Current - IEC	1.5A
Voltage - UL600VWire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Voltage - IEC	800V
Wire Gauge or Range - AWG10-24 AWGWire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Current - UL	1.5A
Wire Gauge or Range - mm²0.2-4mm²FeaturesDiodeColorGray	Voltage - UL	600V
FeaturesDiodeColorGray	Wire Gauge or Range - AWG	10-24 AWG
Color Gray	Wire Gauge or Range - mm ²	0.2-4mm ²
	Features	Diode
Report errors?	Color	Gray
Report crois:		Report errors?

3211919 Guarantees

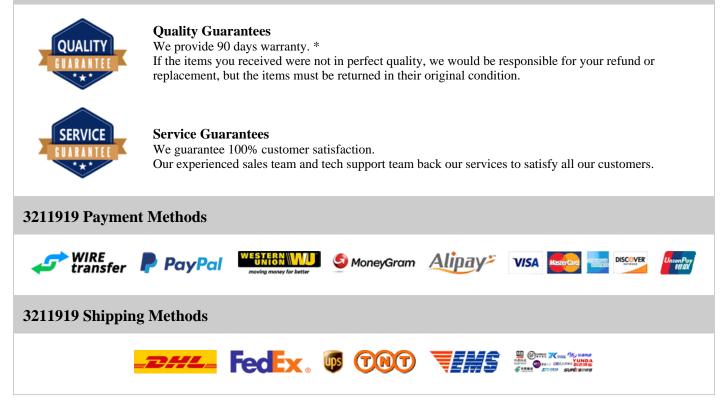

If you have any question about 3211919, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com