

346-87-144-41-036101

346-87-144-41-036101 Information



E-mail: salesdept@heisener.com

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



346-87-144-41-036101 Specifications

Manufacturer Part Number346-87-144-41-036101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series346Connector TypeSocketContact TypeBoard to BoardStyleBoard to BoardNumber of Positions44Number of Positions LoadedINumber of Rows1Number of Rows1Number of RowsInrough HoleYernintingOrige StyleStateing TypeOrige StyleStateing TypeGoldStateing TypeGoldStateing TypeGoldStateing TypeGoldStateing TypeIsabalStateing TypeIsabalStateing TypeIsabalStateing TypeIsabalStateing TypeIsabalStateing TypeIsabalStateing TypeStackenStateing TypeIsabalStateing TypeStackenStateing TypeIsabalStateing TypeStackenStateing TypeStackenStateing TypeIsabalStateing TypeStackenStateing TypeIsabalStateing TypeStackenStateing TypeStackenStateing TypeStackenStateing TypeStackenStateing TypeStackenStateing TypeStackenStateing TypeStackenStateing Type <th></th> <th></th>				
CategoryConnectors. InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series346Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of Rows-Number of Rows1Row Spacing - Mating-Press-Fit, SolderPress-Fit, SolderFastening TypePosh-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Manufacturer Part Number	346-87-144-41-036101		
Package-Series346Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Youring TypePress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldStorter Finish Thickness - MatingGoldContact Finish Thickness - MatingFiashStorter Finish Thickness - MatingSolderInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Preci-Dip		
Package-Series346Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypePress-Fit, SolderFastening TypePosh-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.107° (2.79mm)Optenting Temperature55° C ~ 125°C	Category	Connectors, Interconnects		
Series346Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYounder Finish - MatingOldoContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBiackInsulation Height0.103" (4.40mm)Contact Length - Post0.110" (2.57mm)Contact Length - Post0.110" (2.57mm)Contact Finish ThicknessSick - 215°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllNumber of Positions Loaded0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderContact Finish - MatingGoldContact Finish - MatingBackInsulation ColorBlackInsulation Height0.107° (4.40mm)Contact Length - Post0.110° (2.79mm)Operating Temperature-5°C ~ 125°C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening TypeSoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Series	346		
StyleBoard to BoardStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening Type9ush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post55°C ~ 125°C	Connector Type	Socket		
Number of Positions 44 Number of Positions Loaded All Number of Positions Loaded 0.100" (2.54mm) Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Press-Fit, Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Flash Insulation Color Black Insulation Height 0.173" (4.40mm) Contact Length - Post 0.110" (2.79mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldRouting ColorFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)Operating Temperature55°C ~ 125°C	Number of Positions	44		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingHashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationPress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1		
TerminationPress-Fit, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Termination	Press-Fit, Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height0.173" (4.40mm)Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	Flash		
Contact Length - Post0.110" (2.79mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.173" (4.40mm)		
	Contact Length - Post	0.110" (2.79mm)		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

346-87-144-41-036101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

346-87-144-41-036101 Payment Methods

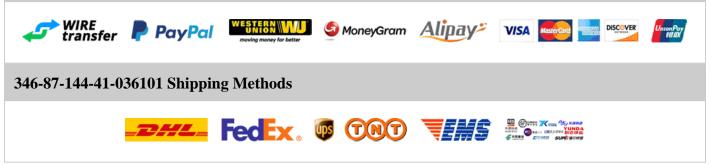

If you have any question about 346-87-144-41-036101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com