

36-25 Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




Request a Quote

36-25 Specifications

Manufacturer Part Number 36-25 Manufacturer Signal Transformers Category Transformers Package - Package - Stries - Type Laminated Core Voltage - Primary 05V, 115V, 125V, 230V Voltage - Secondary (Full Load) Parallel 18V, Series 36V Current - Output (Max) Parallel 50A, Series 25A Primary Winding(s) Single, Multiple Taps Secondary Winding(s) Dual Power - Max 900 VA Mounting Type Chasis Mount Termination Style Solder, Quick Connect Size / Dimension 162.00mm Lx 146.10mm W Height - Seated (Max) 134.90mm Weight Yes (Stries Stries)		
CategoryTransformersPackage-Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)OulaCenter TapYesPower - Max900 VAMounting TypeChasis MountSize / DimensionSidler, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)1500VrmsWeightStore Secondary (Maxing)	Manufacturer Part Number	36-25
Power TransformersPackage-Series-TypeLaminated CoreVoltage Primary105V, 115V, 125V, 230VVoltage Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeChasis MountSize / DimensionI62.00mm L x 146.10mm WSize / Dimension134.90mmVoltage - IsolationStooVrmsWeight27 lbs (12.2kg)	Manufacturer	Signal Transformer
Package-Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WSize / Dimension134.90mmHeight - Seated (Max)500 VrnsWeight27 lbs (12.2kg)	Category	Transformers
Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)314.90mmWoltage - Isolation500 VrmsWeightStolars, 27 bs (12.2kg)		Power Transformers
TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter Tap900 VAPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)1500VrmsWottge - IsolationStoler, SuccessWeight27 lbs (12.2kg)	Package	-
Yoltage - Primary 105V, 115V, 125V, 230V Voltage - Secondary (Full Load) Parallel 18V, Series 36V Current - Output (Max) Parallel 50A, Series 25A Primary Winding(s) Single, Multiple Taps Secondary Winding(s) Dual Center Tap Yes Power - Max 900 VA Mounting Type Chasis Mount Termination Style Solder, Quick Connect Size / Dimension 142.00mm L x 146.10mm W Height - Seated (Max) 134.90mm Voltage - Isolation 27 Ibs (12.2kg)	Series	-
Voltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation27 lbs (12.2kg)	Туре	Laminated Core
Current - Output (Max)Parallel 50A, Series 25APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 Ibs (12.2kg)	Voltage - Primary	105V, 115V, 125V, 230V
Primary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Voltage - Secondary (Full Load)	Parallel 18V, Series 36V
Secondary Winding(s)DualCenter TapYesPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Current - Output (Max)	Parallel 50A, Series 25A
Center TapYesPower - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Primary Winding(s)	Single, Multiple Taps
Power - Max900 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Secondary Winding(s)	Dual
Nounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Center Tap	Yes
Termination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 146.10mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Power - Max	900 VA
Size / Dimension 162.00mm L x 146.10mm W Height - Seated (Max) 134.90mm Voltage - Isolation 1500Vrms Weight 27 lbs (12.2kg)	Mounting Type	Chassis Mount
Height - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Termination Style	Solder, Quick Connect
Voltage - Isolation1500VrmsWeight27 lbs (12.2kg)	Size / Dimension	162.00mm L x 146.10mm W
Weight 27 lbs (12.2kg)	Height - Seated (Max)	134.90mm
-	Voltage - Isolation	1500Vrms
Report errors?	Weight	27 lbs (12.2kg)
		Report errors?

36-25 Guarantees

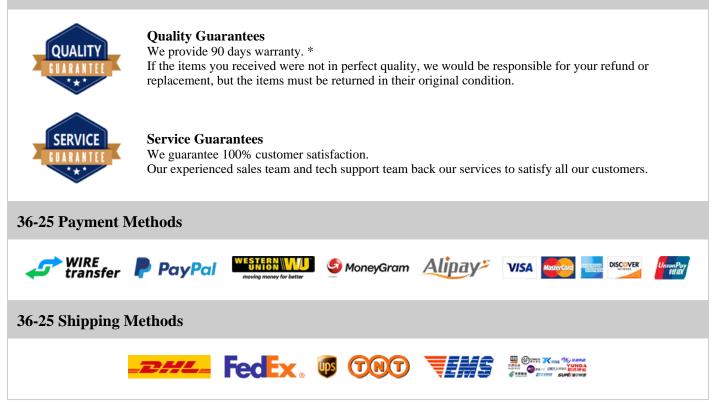

If you have any question about 36-25, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com