

3FD-412

3FD-412 Information



Part Number	3FD-412	
Manufacturer	Tamura	
Category	Transformers Power Transformers	
Description	XFRMR LAMINATED 6VA THRU HOLE	
Package	-	
	For the pricing/inventory/lead time, please contact	
	us	
	Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



3FD-412 Specifications

Manufacturer Part NumberSFD-412ManufacturerTamuraCategoryTransformersPackage-SeriesSFD-4xxTypeLaminated CoreVoltage - PrimaryISV 230VVoltage - Secondary (Full Load)Paralel 6.3V, Series 12.6VCurrent - Output (Max)Paralel 1A, Series 500mAPower TansformersDaulSecondary Winding(s)DualPower Max6 VANoment StateSecondary Unding(s)Power MaxSecondary Unding Secondary Undig Secondary Unding Secondary Unding Seco	-	
CategoryTransformersPackage-Series3FD-4xxTypeLaminated CoreVoltage - Primary15V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 1.A, Series 500mAPrimary Winding(s)DualCenter TapNoPower - Max6 VAPower - MaxPrimary Minding SileFurmination StyleDirong HoleSize / DimensionH.Somma La Satama WHeight - Seated (Max)38.00mmVoltage - IsolationStooVrmsWeight-Weight-	Manufacturer Part Number	3FD-412
PackagePower TransformersPackage-Series3FD-4xxTypeLaminated CoreVoltage - Primary15V, 230VVoltage - Secondary (Full Load)Parallel A, Series 12.6VCurrent - Output (Max)Parallel A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCurter TapNoPower - Max6 VANounting TypeSecondary Secondary Seconda	Manufacturer	Tamura
Package-Series3FD-4xxTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeInrough HoleSize / Dimension92 PinSize / Dimension38.00mmHeight - Seated (Max)500VrmsWeight-	Category	Transformers
Series3FD-4xxTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.00mmHeight - Seated (Max)SoormanWeight-		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension38.00mmHeight - Seated (Max)SoortmanWoltage - Isolation500Vrms	Package	-
YVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension38.00mm L x 34.83mm WHeight - Seated (Max)3500VrmsVoltage - Isolation2500Vrms	Series	3FD-4xx
Voltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.00mm L x 34.83mm WHeight - Seated (Max)3500VrmsWeight-	Туре	Laminated Core
Current - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension38.00mm L x 34.83mm WHeight - Seated (Max)S500VrmsVoltage - Isolation-Weight-	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Voltage - Secondary (Full Load)	Parallel 6.3V, Series 12.6V
Secondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)S8.00mmVoltage - Isolation2500VrmsWeight-	Current - Output (Max)	Parallel 1A, Series 500mA
Center TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Primary Winding(s)	Dual
Power - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Center Tap	No
Termination StylePC PinSize / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Power - Max	6 VA
Size / Dimension41.50mm L x 34.83mm WHeight - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Mounting Type	Through Hole
Height - Seated (Max)38.00mmVoltage - Isolation2500VrmsWeight-	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight-	Size / Dimension	41.50mm L x 34.83mm W
Weight -	Height - Seated (Max)	38.00mm
-	Voltage - Isolation	2500Vrms
Report errors?	Weight	-
		Report errors?

3FD-412 Guarantees

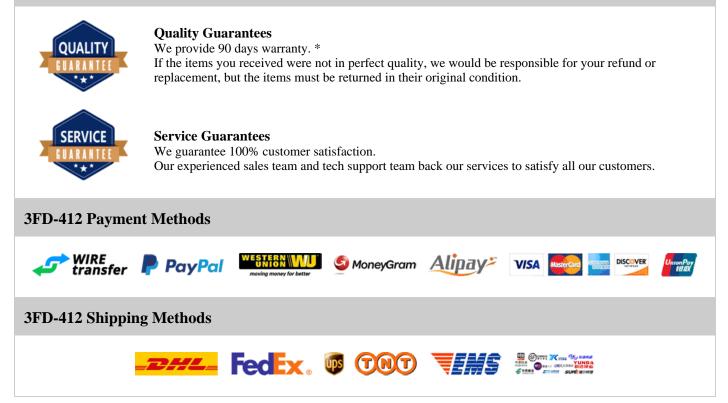

If you have any question about 3FD-412, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com