

40-60-LPI

40-60-LPI Information

Heisener.com	Part Number Manufacturer Category Description Package	40-60-LPI Signal Transformer Transformers Power Transformers XFRMR SEMI-TORO 2.5VA THRU HOLE - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



40-60-LPI Specifications

Manufacturer Part Number40-60-LP1ManufacturerSignal TransformerCategoryTransformersPackage-Package-SeriesLPITypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)DualSecondary Winding(s)DualSecondary Winding(s)DualPower - Max2.5 VAMounting TypeThrough Hole
CategoryTansformersPackage-Package-SeriesLPITypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)DualPrimary Winding(s)DualSecondary Winding(s)DualPower - Max2.5 VA
IntegritPower TransformersPackage-SeriesLPITypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)Parallel 120mA, Series 60mAPrimary Winding(s)DualSecondary Winding(s)DualPower - MaxSeveration of the second
Package - Series LPI Type Semi-Toroidal Voltage - Primary 15V, 230V Voltage - Secondary (Full Load) Parallel 20V, Series 40V Current - Output (Max) Parallel 120mA, Series 60mA Primary Winding(s) Dual Secondary Winding(s) Dual Power - Max Social
SeriesLPITypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)Parallel 120mA, Series 60mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max2.5 VA
TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)Parallel 120mA, Series 60mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max2.5 VA
Voltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)Parallel 120mA, Series 60mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max2.5 VA
Voltage - Secondary (Full Load)Parallel 20V, Series 40VCurrent - Output (Max)Parallel 120mA, Series 60mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max2.5 VA
Current - Output (Max)Parallel 120mA, Series 60mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max2.5 VA
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max2.5 VA
Secondary Winding(s)DualCenter TapNoPower - Max2.5 VA
Center TapNoPower - Max2.5 VA
Power - Max 2.5 VA
Mounting Type Through Hole
mounting Type
Termination Style PC Pin
Size / Dimension 60.20mm L x 42.10mm W
Height - Seated (Max) 18.30mm
Voltage - Isolation 4000Vrms
Weight 0.27 lb (122.47g)
Report error

40-60-LPI Guarantees

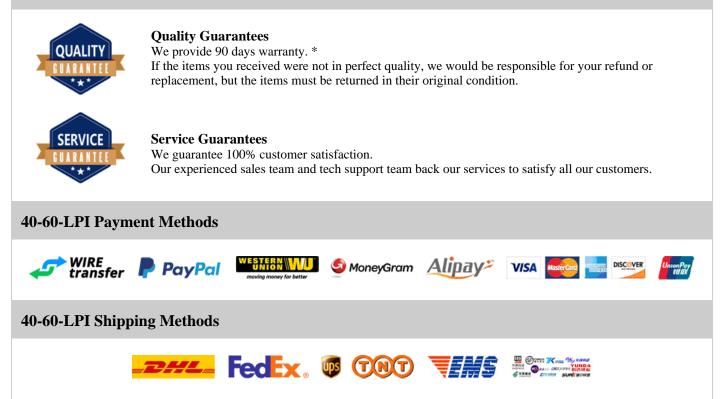

If you have any question about 40-60-LPI, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com